

FUGRO SEAWATCH WIND LIDAR BUOY WS 190
PRE-DEPLOYMENT VALIDATION

Assessment of the Fugro Seawatch Wind LiDAR Buoy WS 190 Pre-Deployment Validation at Frøya, Norway

Fugro Norway AS

Report No.: 10129033-R-10, Rev. B

Date: 2019-11-28



IMPORTANT NOTICE AND DISCLAIMER

1. This document is intended for the sole use of the Client as detailed on the front page of this document to whom the document is addressed and who has entered into a written agreement with the DNV GL entity issuing this document ("DNV GL"). To the extent permitted by law, neither DNV GL nor any group company (the "Group") assumes any responsibility whether in contract, tort including without limitation negligence, or otherwise howsoever, to third parties (being persons other than the Client), and no company in the Group other than DNV GL shall be liable for any loss or damage whatsoever suffered by virtue of any act, omission or default (whether arising by negligence or otherwise) by DNV GL, the Group or any of its or their servants, subcontractors or agents. This document must be read in its entirety and is subject to any assumptions and qualifications expressed therein as well as in any other relevant communications in connection with it. This document may contain detailed technical data which is intended for use only by persons possessing requisite expertise in its subject matter.
2. This document is protected by copyright and may only be reproduced and circulated in accordance with the Document Classification and associated conditions stipulated or referred to in this document and/or in DNV GL's written agreement with the Client. No part of this document may be disclosed in any public offering memorandum, prospectus or stock exchange listing, circular or announcement without the express and prior written consent of DNV GL. A Document Classification permitting the Client to redistribute this document shall not thereby imply that DNV GL has any liability to any recipient other than the Client.
3. This document has been produced from information relating to dates and periods referred to in this document. This document does not imply that any information is not subject to change. Except and to the extent that checking or verification of information or data is expressly agreed within the written scope of its services, DNV GL shall not be responsible in any way in connection with erroneous information or data provided to it by the Client or any third party, or for the effects of any such erroneous information or data whether or not contained or referred to in this document.
4. Any wind or energy forecasts estimates or predictions are subject to factors not all of which are within the scope of the probability and uncertainties contained or referred to in this document and nothing in this document guarantees any particular wind speed or energy output.

KEY TO DOCUMENT CLASSIFICATION

Strictly Confidential	:	For disclosure only to named individuals within the Client's organisation.
Private and Confidential	:	For disclosure only to individuals directly concerned with the subject matter of the document within the Client's organisation.
Commercial in Confidence	:	Not to be disclosed outside the Client's organisation.
DNV GL only	:	Not to be disclosed to non-DNV GL staff
Client's Discretion	:	Distribution for information only at the discretion of the Client (subject to the above Important Notice and Disclaimer and the terms of DNV GL's written agreement with the Client).
Published	:	Available for information only to the general public (subject to the above Important Notice and Disclaimer).

Project name: Fugro Seawatch Wind LiDAR Buoy WS 190 DNV GL – Energy
Pre-Deployment Validation Renewables Advisory
Report title: Assessment of the Fugro Seawatch Wind
LiDAR Buoy WS 190 Pre-Deployment Validation at Frøya, Norway GL Garrad Hassan Deutschland GmbH
Sommerdeich 14 b
Customer: Fugro Norway AS 25709 Kaiser-Wilhelm-Koog
Pirsenteret Havnegata 9 Germany
7010 Trondheim Tel: +49 4856 901 0
Norway
Contact person: Arve Berg VAT No. DE 118 606 038
Date of issue: 2019-11-28
Project No.: 10129033
Report No.: 10129033-R-10, Rev. B

Task and objective: 3rd Party Assessment of an Offshore/Nearshore Pre-Deployment Validation of the Fugro/Oceanor SEAWATCH Wind LiDAR Buoy WS190 at the Island Frøya, Norway

Prepared by:

Verified and approved by:

Andreas Mark
Senior Engineer
Power Performance & Loads & Wind
Resource

Bastian Schmidt
Team Leader, Remote Sensing
Power Performance & Loads & Wind
Resource

- ☐ Strictly Confidential
☐ Private and Confidential
☐ Commercial in Confidence
☐ DNV GL only
☒ Client's Discretion
☐ Published

Keywords:
LiDAR, Floating Lidar System, Pre-deployment
Verification

Reference to part of this report which may lead to misinterpretation is not permissible.

Rev. No.	Date	Reason for Issue	Prepared by	Verified by	Approved by
A	2019-06-25	First Issue	A. Mark	B. Schmidt	B. Schmidt
B	2019-11-28	Consideration of client's comments	A. Mark	B. Schmidt	B. Schmidt

Table of contents

1	INTRODUCTION.....	1
1.1	Clarification Note	2
2	SETUP OF THE SWLB PRE-DEPLOYMENT VALIDATIONS.....	3
2.1	Positions of installed SWLB and RLL Units	3
2.2	Settings and Specs of SWLB and RLL Units	4
3	VALIDATION RESULTS.....	5
3.1	Data provision	5
3.2	Meteorological and sea state conditions during the trial	5
3.3	Data filtering	6
3.4	Accuracy	6
3.5	Summary of verification results	9
4	PERFORMANCE VERIFICATION ACCORDING TO IEC STANDARD, ANNEX L	11
4.1	Performance verification uncertainty	14
5	REMARKS AND LIMITATIONS	22
5.1	General	22
5.2	Pre- and Post-Deployment Verification	22
5.3	Design Specifics of WS190	22
6	CONCLUSIONS ON SWL BUOY TECHNOLOGY IN CONTEXT OF COMMERCIAL ROADMAP	23
7	REFERENCES.....	24
	APPENDIX A – APPLIED KEY PERFORMANCE INDICATORS AND ACCEPTANCE CRITERIA FOR FLS PRE-DEPLOYMENT VALIDATION	25
	APPENDIX B – CAMPAIGN METEOROLOGICAL CONDITIONS, TIME SERIES AND WS/WD CORRELATION PLOTS.....	27
	APPENDIX C – WAVES AND TIDES	33
	APPENDIX D – UNCERTAINTY	35
	APPENDIX E –WS COMPARISON WITHOUT SECTOR FILTER.....	36

List of abbreviations

Abbreviation	Meaning
SWLB	Seawatch Wind Lidar Buoy
DNV GL	GL Garrad Hassan Deutschland GmbH, part of DNV GL group
RLL	Reference Land Lidar
RSD	Remote Sensing Device
FLS	Floating Lidar System
MSL	Mean Sea Level
MWD	Mean Wind Direction
MWS	Mean Wind Speed
SL	actual Sea Level
LAT	Lowest astronomical tide
KPI	Key Performance Indicator
AC	Acceptance Criterion
WS	Wind Speed
WD	Wind Direction
TCM	Tilt-Compensated Magnetic Compass
DGPS	Differential Global Positioning System

1 INTRODUCTION

On 2019-05-13, Fugro Norway AS (Fugro or the Client) commissioned GL Garrad Hassan Deutschland GmbH (DNV GL) to perform a pre-deployment validation including uncertainty assessment of a SEAWATCH Wind LiDAR Buoy unit with the serial number WS190 moored next to the Island Frøya in the Norwegian Sea (see Figure 1).

The pre-deployment validation of this Floating Lidar System (FLS), which is already “Roadmap-Pre-Commercial” staged [1], was performed over a period of around 36.7 days against a fixed/land based industry accepted Lidar (Reference Land Lidar or RLL), that was used as the only validation reference. Data evaluation is performed based on Key Performance Indicators (KPIs) and Acceptance Criteria (AC) delineated in the Roadmap towards Commercial Acceptance [2].

DNV GL has not been involved in the data collection. Data from both the SWLB and the RLL were provided by Fugro.

This report is used to document the results with respect to the pre-deployment validation trial of the Fugro Seawatch Wind Lidar Buoy (SWLB) with S/N WS190 against a Reference Land Lidar (RLL) of type ZX Lidars Z300 with the S/N ZP495 at the Fugro test site near and on the Norwegian Island Frøya at a place called Stabben, in the Norwegian Sea.

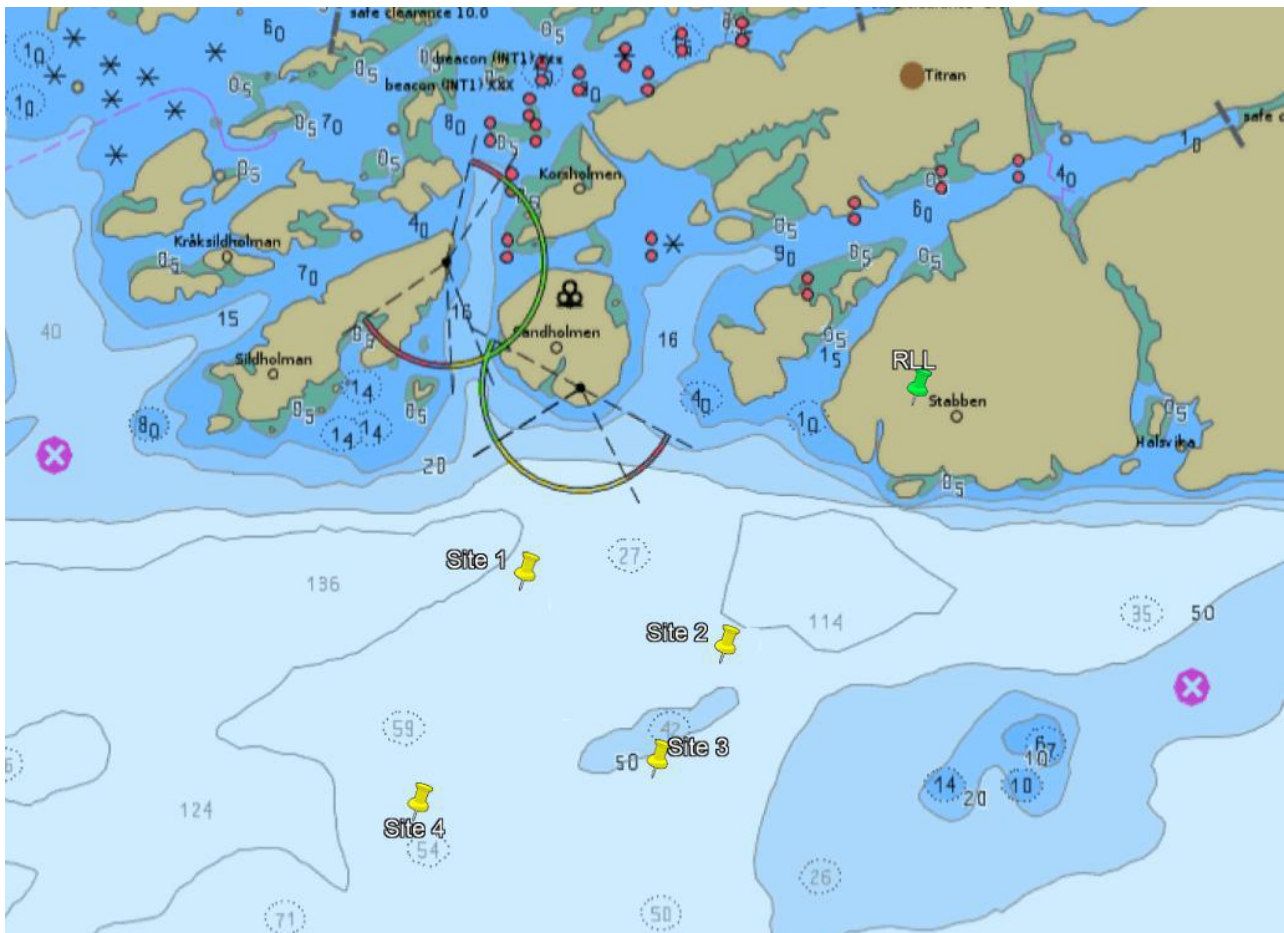


Figure 1: Positions of SWLB (WS190) and RLL (Land Lidar) near or at the Island Frøya / Stabben.

1.1 Clarification Note

It is important to note that the validation approach applied for this campaign focusses on the capabilities of floating LiDAR technology (namely in this case for the SWLB with the buoy's S/N WS190 employing a ZX Lidars ZX300 Lidar with the S/N ZX843) measuring primary wind data, namely wind speed and wind direction. Therefore, while the SWLB currently features additional measures the scope of this document is limited to its primary wind data measurements. The SWLB wind direction data was stored as two separate datasets – one dataset is based on DGPS correction and the other one is based on magnetic compass correction. All results in this report are based on the DGPS wind direction signal.

DNV GL understands that the tested SWLB Floating Lidar unit is planned to be deployed after the campaign analyzed in this report. The analyzed campaign serves as the according pre-deployment validation.

DNV GL understands and assumes that there is agreement between Fugro and their client that a pre-deployment validation of an already "Roadmap-Pre-Commercial" staged FLS against a fixed/land based industry accepted Lidar to be used as the only validation reference (RLL) is acceptable.

It is further understood that the following conditions have to be fulfilled in this validation context:

- The RLL has successfully been validated against an IEC compliant onshore met mast:
→ this is fulfilled by a Lidar validation performed at the ZX Lidars UK Remote Sensing Test Site near Pershore, UK, independently verified by DNV GL [4]
- The Lidar mounted on the SWLB has successfully been validated against an IEC compliant onshore met mast → this is fulfilled by a Lidar validation performed at the ZX Lidars UK Remote Sensing Test Site near Pershore, UK, which was reviewed by DNV GL [5]
- The suitability of Frøya test site, i.e. given comparativeness of wind conditions between locations of Reference Land Lidar (RLL) and SWLB
- Setup of RLL in compliance with industry best practice
→ confirmed by installation report from DNV GL [3]

The wind speed data coverage and bin wise completeness according to the Roadmap [1] is achieved except missing datasets above 10 m/s at 40m and 60m.

The wind speed and wind direction comparison results yielded according to relevant Roadmap KPIs and ACs meet at least the Roadmap Minimum Acceptance Criteria.

The representativeness of wave conditions experienced at the Frøya test site for the projected deployment site should ideally be shown, but the range of conditions may not always be attained for a shorter trial duration.

In general, the test site has conditions which are representative for the Dutch site Ten Noorden van de Waddeneilanden (TWD). From the SWLB type verification trial at Ijmuiden [6] and further historical evidence DNV GL is confident that the performance of the SWLB device WS190 as shown in this shorter pre-deployment verification campaign can be transferred to more demanding wave conditions than seen in this short verification period at Frøya.

2 SETUP OF THE SWLB PRE-DEPLOYMENT VALIDATIONS

DNV GL has performed a site visit at the Stabben/Frøya site on 2015-03-25 [3] in order to inspect the suitability to serve as a test site for FLS validations. In addition to this, substantial evidence has now been collected by

1. acknowledging the information provided by Fugro to DNV GL on the side upfront,
2. seeing the generally consistent resemblance between SWLB and RLL at the given spatial separation of 980 m and over the full height range as shown in this report and
3. from the site inspection itself, considering the terrain as rather benign.

With this DNV GL considers Stabben/Frøya test site is suitable for pre-deployment verifications of FLS.

2.1 Positions of installed SWLB and RLL Units

Position of ZephIR Reference Land Lidar, see Figure 2, right:

- The location is called Stabben on the Island Frøya and the RLL is placed at 14 m above sea level (mean sea level or MSL).
- The GPS position of the RLL is Latitude 63.66292°, Longitude 8.31011°

Position of Seawatch Wind Lidar Buoy (SWLB) Floating Lidar Device, see Figure 2, left:

- The SWLB is deployed at position Latitude 63.6553°, Longitude 8.3000° (see Figure 1, Site 3)
- It is moored in 50 m of water depth and the mooring array allows a horizontal sway freedom of movement around the anchor of about 115 m.
- The mooring point is about 820 m from the shore of a place called Stabben and approx. 980 m to the South West of the RLL position, see Figure 1.

These positions were confirmed during a site visit and RLL inspection by DNV GL, on 2015-03-25 [3] (for the RLL) and from direct GPS recordings in the FLS data.



Figure 2: Seawatch Wind Lidar Buoy (left¹) and Reference Land Lidar as installed near/at Frøya test site.

¹ The shown LiDAR buoy is similar to the validated one

2.2 Settings and Specs of SWLB and RLL Units

SWLB Floating Lidar:

- SWLB S/N WS190
- ZephIR S/N ZX843
- Height settings 250, 200, 180, 160, 140, 120, 100, 80, 60, 40, 30 m relative to actual sea level

Reference Land Lidar:

- ZephIR S/N ZP495
- Height settings 250, 200, 180, 160, 140, 120, 100, 80, 60, 52, 40 m above mean sea level

Table 1: List of heights relevant for wind data comparisons between SWLB and RLL (green shading, targeted heights above MSL/SL

Height Index	Land Reference Lidar (Lidar Window 14m AMSL)		Floating Lidar System (Lidar Window 2m AMSL)	
	Height AMSL	Configured Height	Height AMSL	Configured Height
1	250	236	250	248
2	200	186	200	198
3	180	166	180	178
4	160	146	160	158
5	140	126	140	138
6	120	106	120	118
7	100	86	100	98
8	80	66	80	78
9	60	46	60	58
10	40	26	30	28
Ref Height (non-configurable)	52	38	40	38

The assessment of the KPIs and their respective Acceptance Criteria regarding wind data accuracy was performed at height levels between 40 m and 250 m as mentioned in Table 1.

3 VALIDATION RESULTS

For the pre-deployment validation of Fugro's SWLB against the RLL data from the employed FLS with a ZX Lidars Lidar with the serial number ZX843 and from the RLL ZephIR with the serial number ZP495 were provided by Fugro for a campaign period lasting 2019-04-02 to 2019-05-09, yielding a duration of 36.7 days.

3.1 Data provision

The Following remarks and reservations with respect to data transfer, traceability and processing are noted:

- RLL and SWLB data were provided to DNV GL for the whole campaign period by Fugro, directly.
- SWLB Lidar wind statistics were returned by the central controller unit (called GENI) installed on the SWLB. This unit collected the 1-sec raw data from the on-board ZephIR 300 Lidar to calculate the 10-minute wind data statistics.

3.2 Meteorological and sea state conditions during the trial

During the validation period of the SWLB the device encountered a wide range of wind conditions facing 10-minute averaged wind speeds at the RLL of up to 15.2 m/s at the lowest comparison level (40 m) and 24.2 m/s at the upper most level (250 m) – see Table 2. The air temperatures covered during the campaign at the RLL location and on the SWLB buoy range from -4.4°C to 21.6°C, related time series are displayed in Appendix B.

The significant wave heights observed during the trial period at Frøya were in a range up to 2.49 m, with 4.2 % of the observations above 1.5 m. The experienced maximum wave heights cover a range up to 4.3 m. Compare Appendix C for wave statistics as provided by Fugro. The wave measurements were recorded by the SWLB under trial itself using a 10 min data acquisition and processing interval.

The tidal or water level as observed during the campaign at a place in the North of Frøya called Mausund varies between -154.7 cm and 104.4 cm over MSL. See related time series plot in Appendix C.

Table 2: Maximum 10 min averaged wind speeds measure at the RLL and by the SWLB across the total campaign period.

WS MAX	RLL	SWLB
Height / m	WS / m/s	
250	24.17	24.14
200	22.77	23.36
180	22.07	23.13
160	21.31	21.46
140	20.57	20.62
120	19.90	19.61
100	18.98	18.90
80	17.99	18.36
60	16.84	17.29
40	15.24	16.16

3.3 Data filtering

The following filters were applied to the RLL data to reduce the probability of different wind conditions between RLL position and FLS position:

- WS difference between neighboring heights of RLL < 2m/s
- WD difference between neighboring heights of RLL < 15°
- WD between 140° and 320° (only applied for WS comparison at 40m and 60m)

The sector filter for the lower levels was applied to avoid that the database is influenced by terrain effects which can appear when the wind comes over land to the RLL and FLS. Appendix E shows the WS comparison results without the application of the sector filter.

3.4 Accuracy

DNV GL has analyzed the wind data against the relevant KPIs and Acceptance Criteria given in [1] and in Appendix A which are related to the WS and WD accuracy of the SWLB unit.

The comparisons in this section are based on ten-minute average values at both the floating LiDAR unit and the RLL. For the analysis conducted in this section, a low wind speed cut-off of 2 m/s has been applied for the wind speed comparisons and the wind direction comparisons.

3.4.1 Data coverage requirements for accuracy assessment

In accordance with the data coverage requirements outlined in the Roadmap [1], DNV GL has assessed the data coverage of the floating LiDAR system at the ten (10) measurement heights considered. This has been conducted according to the following requirements:

- a) A minimum number of 40 data points required in each 1 m/s bin wide reference wind speed bin centred between 2.5 m/s and 11.5 m/s, i.e., covering a range between 2 m/s and 12 m/s.
→ This criterion has been fulfilled for the WD comparison database but not for the WS comparison database. The wind speed bins 10 m/s to 12 m/s are slightly incomplete at 40 m and 60 m.
- b) Minimum number of 40 data points required in each 2 m/s bin wide reference wind speed bin centred on 13 m/s and 15 m/s, i.e., covering a range 12 m/s to 16 m/s.
→ This criterion has not been fulfilled. The wind speed bin 12 m/s to 14 m/s is incomplete at 40 m and the wind speed bin 14 m/s to 16 m/s is incomplete at 40 m and 60 m.
- c) A minimum number of 40 data points in each 2 m/s bin wide reference wind speed bin centred on 17 m/s and above, i.e. covering a range above 16 m/s only if such data is available.
→ This criterion is not mandatory.

Table 3 and Table 4 give an overview of the data coverage. The tables show that for all probing levels (except 40 m and 60 m), all WS bins up to 16 m/s have sufficiently been filled.

The incompleteness of the database at the heights 40m and 60m is considered non-critical because the very small impact on the uncertainty at the lower levels will probably make negligible difference to the overall uncertainty of the hub height wind resource assessment.

Table 3: Wind speed data coverage per WS bin. Bins including at least 40 values marked in green. (Database as used for WD comparison)

WS Bin / [m/s]	2 to 3	3 to 4	4 to 5	5 to 6	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	12 to 14	14 to 16	16 to 18	18 to 20	20 to 22	22 to 24	24 to 26	26 to 28	28 to 30
Bin Center / [m/s]	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5	10.5	11.5	13	15	17	19	21	23	25	27	29
Level / [m]	# of data points left after filtering																		
250	246	384	505	565	529	397	298	214	131	140	264	214	68	5	9	5	3	0	0
200	250	404	528	546	542	404	290	233	138	146	241	213	54	7	6	5	0	0	0
180	281	446	581	556	569	442	277	256	150	169	209	225	45	9	4	3	0	0	0
160	283	460	575	557	595	446	278	249	167	177	183	231	36	6	5	0	0	0	0
140	294	474	538	603	608	421	298	253	188	161	196	205	33	4	4	0	0	0	0
120	301	473	534	636	615	403	326	279	187	150	209	171	30	5	0	0	0	0	0
100	338	446	578	638	615	418	352	275	183	124	225	139	22	4	0	0	0	0	0
80	330	453	618	667	637	431	344	271	154	108	221	115	16	0	0	0	0	0	0
60	332	488	640	753	564	454	338	226	133	114	205	75	4	0	0	0	0	0	0
40	377	500	704	690	554	456	302	150	144	103	152	22	0	0	0	0	0	0	0

Table 4: Wind speed data coverage per WS bin. Bins including at least 40 values marked in green. (Database as used for WS comparison)

WS Bin / [m/s]	2 to 3	3 to 4	4 to 5	5 to 6	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	12 to 14	14 to 16	16 to 18	18 to 20	20 to 22	22 to 24	24 to 26	26 to 28	28 to 30
Bin Center / [m/s]	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5	10.5	11.5	13	15	17	19	21	23	25	27	29
Level / [m]	# of data points left after filtering																		
250	246	384	505	565	529	397	298	214	131	140	264	214	68	5	9	5	3	0	0
200	250	404	528	546	542	404	290	233	138	146	241	213	54	7	6	5	0	0	0
180	281	446	581	556	569	442	277	256	150	169	209	225	45	9	4	3	0	0	0
160	283	460	575	557	595	446	278	249	167	177	183	231	36	6	5	0	0	0	0
140	294	474	538	603	608	421	298	253	188	161	196	205	33	4	4	0	0	0	0
120	301	473	534	636	615	403	326	279	187	150	209	171	30	5	0	0	0	0	0
100	338	446	578	638	615	418	352	275	183	124	225	139	22	4	0	0	0	0	0
80	330	453	618	667	637	431	344	271	154	108	221	115	16	0	0	0	0	0	0
60	110	152	213	204	147	117	120	85	39	36	58	12	4	0	0	0	0	0	0
40	122	132	220	162	116	116	112	46	39	36	36	7	0	0	0	0	0	0	0

3.4.2 Wind speed accuracy

A summary of the findings for each wind-speed-related KPI is presented in Table 5. The wind speed accuracy assessment has been conducted at ten heights between 40 and 250 m above MSL.

The slopes (X_{mws}) and Coefficient of Determination (R^2_{mws}) are presented for all compared heights. It can be seen that the KPI for slope fulfills the best practice acceptance criterion [$0.98 < X_{mws} < 1.02$] as given in [1] for the heights 60m to 250m. At the 40m level, the slope passes the minimum acceptance criterion [$0.97 < X_{mws} < 1.03$]. With regards to the Coefficient of Determination (R^2_{mws}) the best practice acceptance criterion [$R^2_{mws} > 0.98$] is fulfilled at 100 m to 250 m for the wind speed range ≥ 2 m/s and at 120 m to 250 m for the wind speed range 4 - 16 m/s. The "Mean Wind Speed – Coefficient of Determination" passed the minimum acceptance criterion [$R^2_{mws} > 0.97$] at all remaining heights for both wind speed ranges.

Plots for WS regression results together with WS time series plots selected for some comparison levels can be found in Appendix B.

Table 5: Overview of linear regression analysis results for wind speed comparisons between the SWL Buoy and the reference Lidar at all available comparison levels. Colour shading indicates the compliance with the prescribed best practice or minimum KPI's Acceptance Criteria (see legend).

	# values	slope	R ²	WS-avg RLL	WS-avg FLS	mean diff.	rel. mean difference
	-	-	-	[m/s]	[m/s]	[m/s]	%
WS-range	KPI X _{mws}		KPI R ² _{mws}				
250 m level							
All >= 2 m/s	3977	1.009	0.987	7.42	7.51	0.087	1.17%
4 - 16 m/s	3257	1.010	0.983	7.96	8.05	0.086	1.08%
200 m level							
All >= 2 m/s	4007	1.003	0.985	7.32	7.36	0.038	0.52%
4 - 16 m/s	3281	1.005	0.987	7.93	7.97	0.044	0.55%
180 m level							
All >= 2 m/s	4222	1.002	0.987	7.19	7.21	0.020	0.28%
4 - 16 m/s	3434	1.003	0.987	7.87	7.90	0.026	0.33%
160 m level							
All >= 2 m/s	4248	1.000	0.988	7.14	7.14	-0.004	-0.05%
4 - 16 m/s	3458	1.000	0.985	7.86	7.86	0.002	0.02%
140 m level							
All >= 2 m/s	4280	0.996	0.986	7.08	7.05	-0.033	-0.47%
4 - 16 m/s	3471	0.996	0.983	7.83	7.80	-0.031	-0.40%
120 m level							
All >= 2 m/s	4319	0.993	0.984	7.01	6.96	-0.055	-0.78%
4 - 16 m/s	3510	0.993	0.980	7.77	7.72	-0.053	-0.69%
100 m level							
All >= 2 m/s	4357	0.991	0.982	6.90	6.83	-0.065	-0.95%
4 - 16 m/s	3547	0.992	0.977	7.66	7.60	-0.063	-0.83%
80 m level							
All >= 2 m/s	4365	0.993	0.978	6.74	6.69	-0.055	-0.82%
4 - 16 m/s	3566	0.993	0.973	7.49	7.44	-0.051	-0.67%
60 m level							
All >= 2 m/s	1297	1.012	0.976	6.43	6.52	0.083	1.29%
4 - 16 m/s	1031	1.012	0.970	7.25	7.34	0.098	1.35%
40 m level							
All >= 2 m/s	1144	1.027	0.973	6.15	6.34	0.184	2.99%
4 - 16 m/s	890	1.026	0.971	7.05	7.25	0.206	2.93%

Legend

KPI

Passed Best practice

KPI

Passed Minimum

KPI

Failed

3.4.3 Wind direction accuracy

The wind direction data comparison was conducted at ten heights between 40 and 250 m above MSL. All results in this report are based on the DGPS wind direction signal.

The results for the wind direction comparison are shown in Table 6 where the Wind Direction Regression Slope (M_{mwd}), the Mean Offset (OFF_{mwd}) and the Coefficient of Determination (R^2_{mwd}) are presented. KPI values for R^2_{mwd} and M_{mwd} fall within the best practice acceptance criteria. The KPI OFF_{mwd} is fulfilled in all heights. Plots for WD regression results selected for all heights are found in Appendix B.

Table 6: Overview of linear regression results for WD comparisons between SWLB and reference Lidar at ten comparison levels. Colour shading indicates compliance with prescribed best practice or minimum KPI's Acceptance Criteria (see legend).

WS filtering for WS > 2 m/s				
Height level	# values	slope	offset [°]	R ²
[m]	[-]	KPI M _{mwd}	KPI OFF _{mwd}	KPI R ² _{mwd}
250	3976	1.000	-1.903	0.994
200	4006	0.999	-1.781	0.994
180	4222	0.999	-2.029	0.993
160	4248	0.998	-1.986	0.993
140	4279	0.999	-1.807	0.995
120	4319	0.999	-1.673	0.995
100	4356	0.999	-1.712	0.996
80	4365	0.997	-1.738	0.995
60	4326	0.999	-1.450	0.995
40	4152	0.999	-1.258	0.994

Legend

KPI	Passed Best practice
KPI	Passed Minimum
KPI	Failed

3.5 Summary of verification results

3.5.1 Campaign Duration

The duration of the verification campaign was 36.7 days. The data requirement for completeness has almost been fulfilled in all required WS bins for data analysis.

3.5.2 Wind Measurement Accuracy

The wind speeds of both the SWLB and the RLL at all comparison heights correlated very well, showing a low level of scattering and good agreement regarding linear regression analyses. This pre-deployment verification results indicate that the SWLB can reproduce fixed Lidar wind speeds at a high level of accuracy. For the KPI "Regression Slope - X_{mws}", the best practice acceptance criterion was passed at all wind speed ranges at all heights except 40 m. The "Mean Wind Speed – Coefficient of Determination" passed the best practice acceptance criterion at heights 100 to 250 m for the wind speed range ≥ 2 m/s and at 120 to 250 m for the wind speed range 4 - 16 m/s. The "Mean Wind Speed – Coefficient of Determination" passed the minimum acceptance criterion at all remaining heights for both wind speed ranges.

For wind direction Best Practice criteria for the KPIs "Mean Wind Direction – Slope", "Mean Wind Direction – Coefficient of Determination" were passed at all heights. The KPI "Mean Wind Direction – Offset" was passed at all heights within the best practice acceptance criteria. Overall, the obtained results indicate the SWLB's capability of reproducing fixed Lidar wind directions at an acceptable high level of accuracy.

The detailed results with respect to KPIs and ACs for wind speed and wind direction comparisons are given in Table 7 below.

Table 7: Summary of achievement after 36.7 days with regards to KPIs and Acceptance Criteria for the data accuracy assessment

KPI	Definition / Rationale	Acceptance Criteria across total campaign duration	
		Best Practice	Minimum
X_{mws}	Mean Wind Speed – Slope Assessed for wind speed range [all above 2 m/s] [4-16 m/s]	0.98 – 1.02 Results: [0.991 to 1.012] Passed at 60 to 250m [0.992 to 1.012] Passed at 60 to 250m	0.97 – 1.03 Results: [1.027] Passed at 40m [1.026] Passed at 40m
R^2_{mws}	Mean Wind Speed – Coefficient of Determination Assessed for wind speed range [all above 2 m/s] [4 – 16 m/s]	>0.98 Results: [0.982 to 0.988] Passed at 100 to 250m [0.980 to 0.987] Passed at 120 to 250m	>0.97 Results: [0.973 to 0.978] Passed at 40 to 80m [0.970 to 0.977] Passed at 40 to 100m
M_{mwd}	Mean Wind Direction – Slope Asessed for wind speed range [all above 2 m/s]	0.97 – 1.03 Results: [0.997 to 1.000] Passed at all heights	0.95 – 1.05
R^2_{mwd}	Mean Wind Direction – Coefficient of Determination (same as for M_{mwd})	> 0.97 Results: [0.993 to 0.996] Passed at all heights	> 0.95
OFF_{mwd}	Mean Wind Direction – Offset, in terms of the mean absolute WD difference over the total campaign duration (same as for M_{mwd})	< 5° Results: [-2.0° to -1.3°] Passed at all heights	< 10°

4 PERFORMANCE VERIFICATION ACCORDING TO IEC STANDARD, ANNEX L

This subsection represents as a supplement to the standard LiDAR DNV GL / NORSEWInD performance verification test with respect to a FLS validation approach as described in the latest edition of the IEC standard for power performance tests [10]. This approach is based on a wind speed bin averaged procedure in order to compare the horizontal wind speed measurements acquired by the FLS and the RLL. The objective of the IEC approach is to calculate the bin-wise deviation of the two sources and report the associated uncertainty.

The bin averaging procedure was performed using 0.5 m/s wide wind speed bins centred on integers of from 4 to 16 m/s. In order to achieve statistic relevance this IEC approach requires

- a minimum of three (3) 10-minute values available within each wind speed bin and
- a total amount of 180 hours of valid data (corresponding to a number of 1080 10-min values)

Figures 3 to 6 show scatter plots of the wind speed comparison based on 10 min averages between the data pairs of the FLS and RLL at 60 m, 80 m, 100 m and 120 m, respectively. In addition, the 10-minute averaged deviation for each data point of the two data sets is plotted (red dots).

The uncertainties have been calculated for wind speed bins and heights where the uncertainty of the RLL was available. Uncertainty values from the closest available height have been taken if height difference between the RLL verification and FLS verification were present.

Furthermore, the correlation coefficient, mean deviation and standard deviation of the deviations are shown in Table 8. The relative deviation of the data pairs was calculated in relation to the RLL wind speeds as reference.

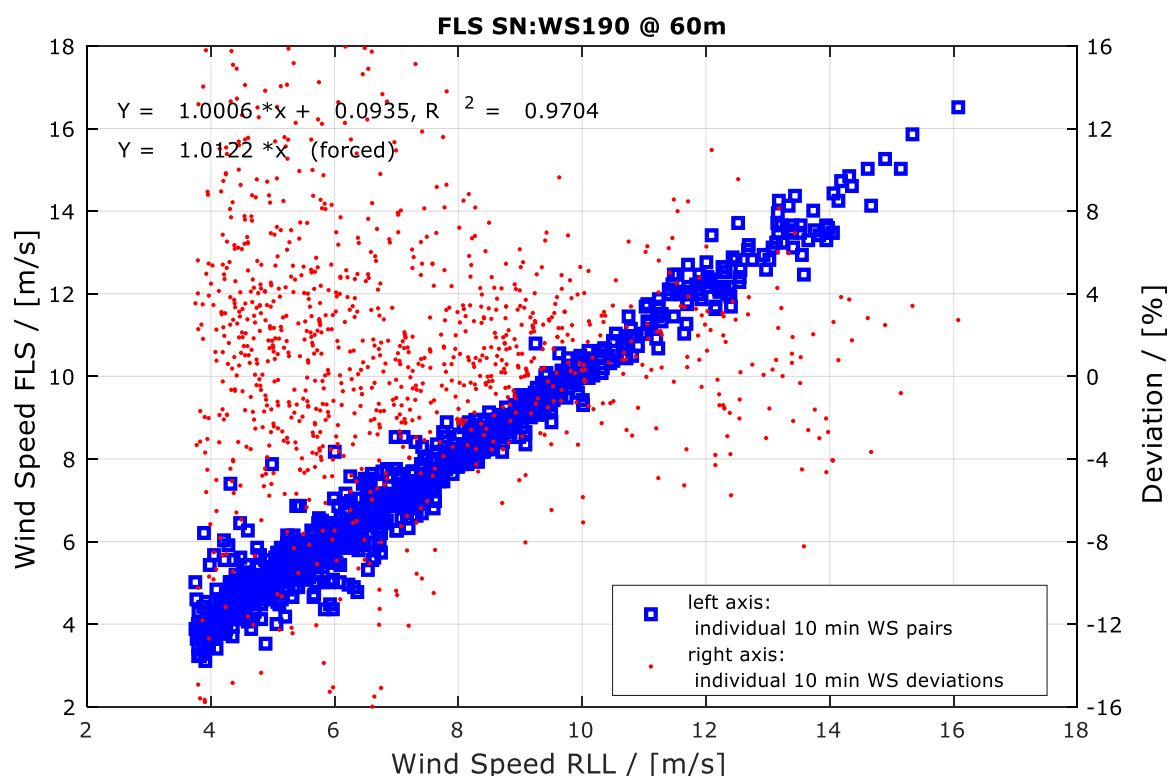


Figure 3: Comparison of the horizontal wind speed component at 60 m

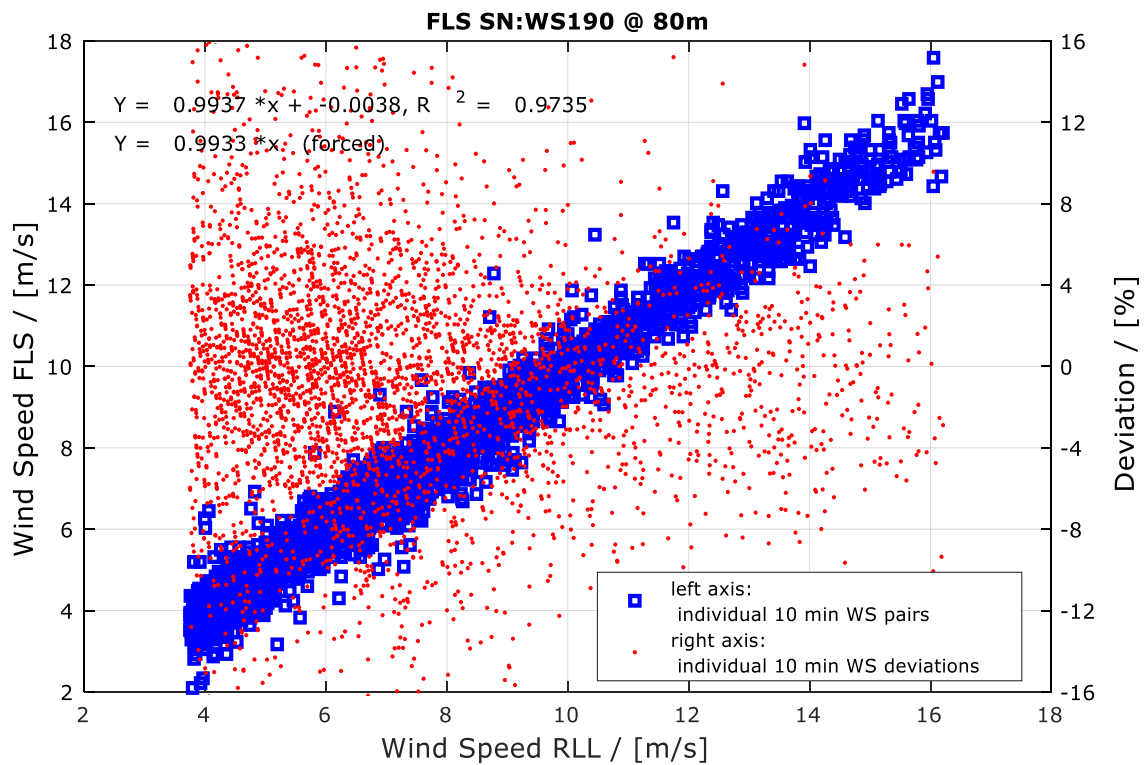


Figure 4: Comparison of the horizontal wind speed component at 80 m

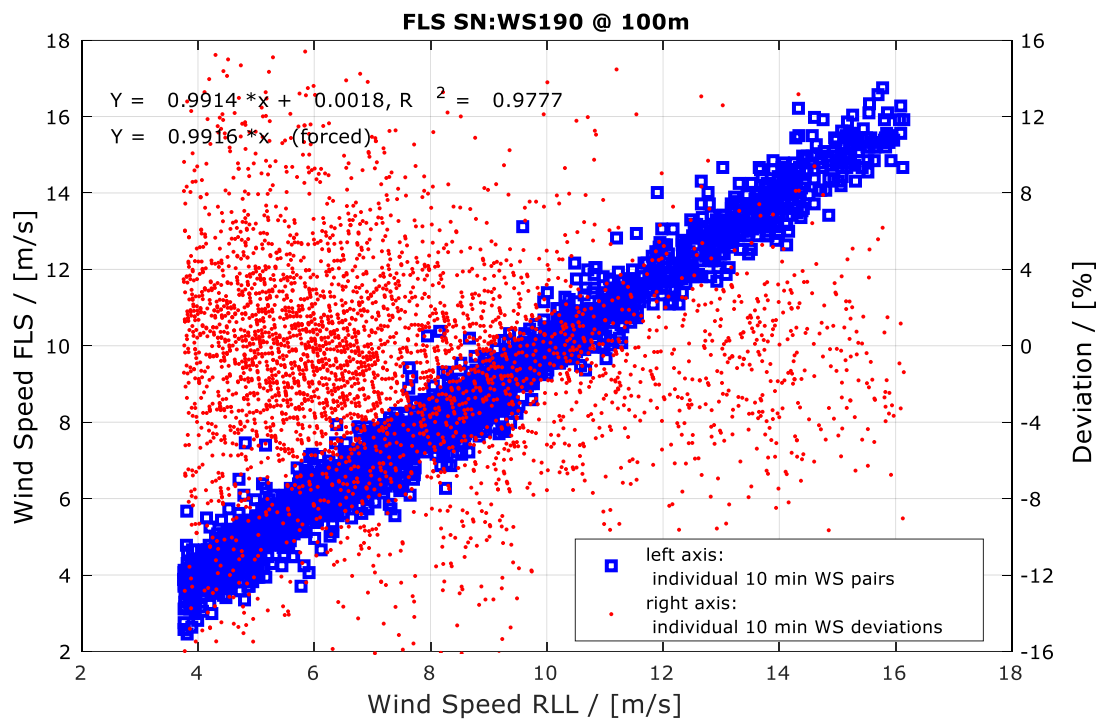


Figure 5: Comparison of the horizontal wind speed component at 100 m

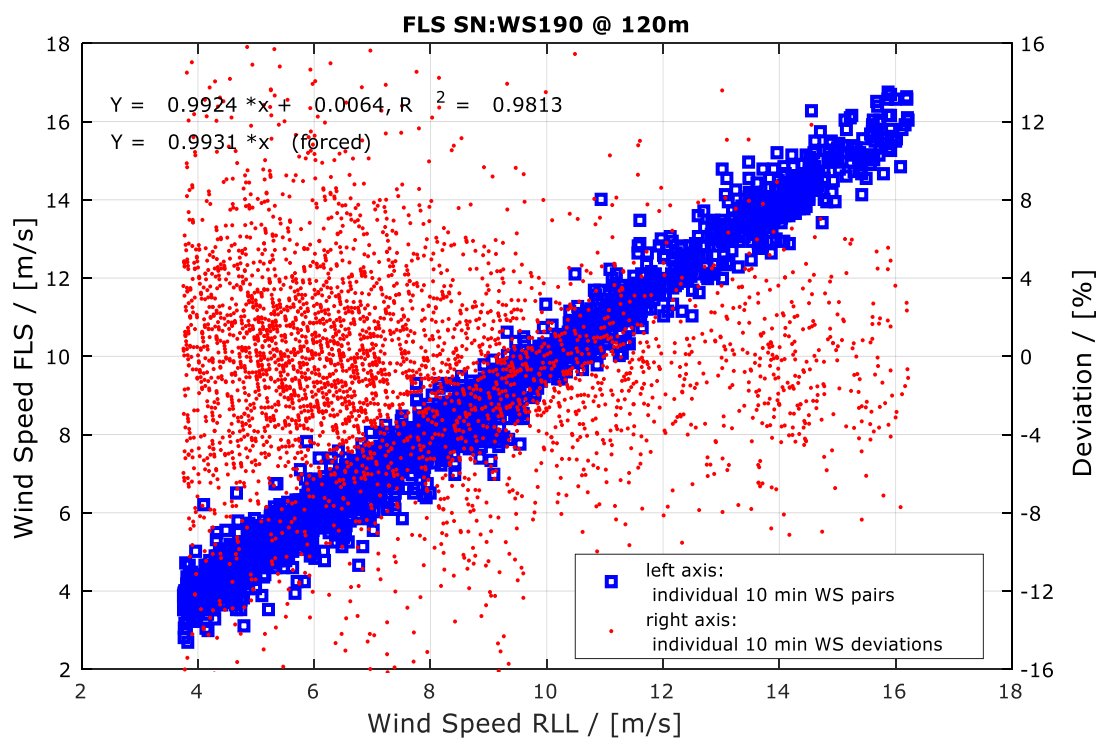


Figure 6: Comparison of the horizontal wind speed component at 120 m

Table 8: Statistical parameters of wind speed deviation

Height level	Coefficient of Determination	Mean Deviation		STD of Deviations	Data Points
[m]	(R ²)	[m/s]	[%]	[%]	#
120	0.9813	-0.05	-0.62%	5.87%	3661
100	0.9777	-0.06	-0.81%	6.32%	3690
80	0.9735	-0.05	-0.67%	6.96%	3724
60	0.9704	0.10	1.60%	7.97%	1070

4.1 Performance verification uncertainty

Bin-averaged wind speeds of the FLS and the RLL are shown in Figures 7 to 10. The bin-averaged deviation (solid red line in the graphs) can be compared to the standard uncertainty of the FLS combined with the statistical uncertainty of the comparison for each of the WS bins. The plots (and the wording in the legend "reduced by mean deviation") are based on IEC 61400-12-1:2017, Figure L.6.

The relative uncertainty was calculated according to IEC 61400-12-1:2017, Annex L.4.3 (Uncertainty resulting from the RSD calibration test):

$$\text{Relative uncertainty} = \text{SQRT}(a^2 + c^2 + d^2 + e^2)$$

(e.g. 3.1% at 60m, 4m/s bin)

with:

a)

the standard uncertainty of the reference (V_{RLL} uncertainty e.g. 2.56%=0.0256 at 60m, 4m/s bin);

b)

the mean deviation of the remote sensing device measurements and the reference sensor measurements (NOTE: This component is not included in the formula above because the uncertainty is "reduced by the mean deviation")

c)

the standard deviation of the measurement of the FLS calculated as the standard deviation of the measurements divided by the square root of the number of data records per bin (e.g. 0.066/4 at 60m, 4m/s bin);

d)

uncertainty of the FLS due to mounting effects (here: 0.5%=0.005);

e)

uncertainty due to non-homogenous flow (here: negligible)

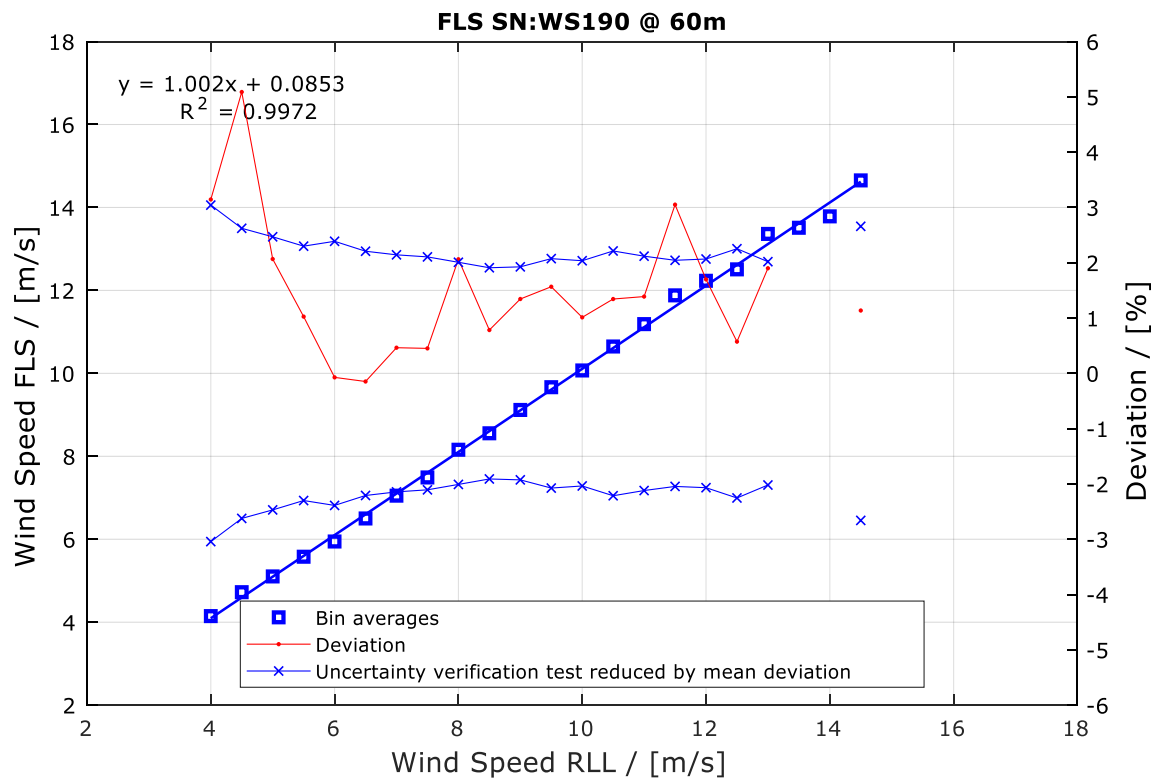


Figure 7: Bin-wise comparison of the horizontal wind speed component at 60 m

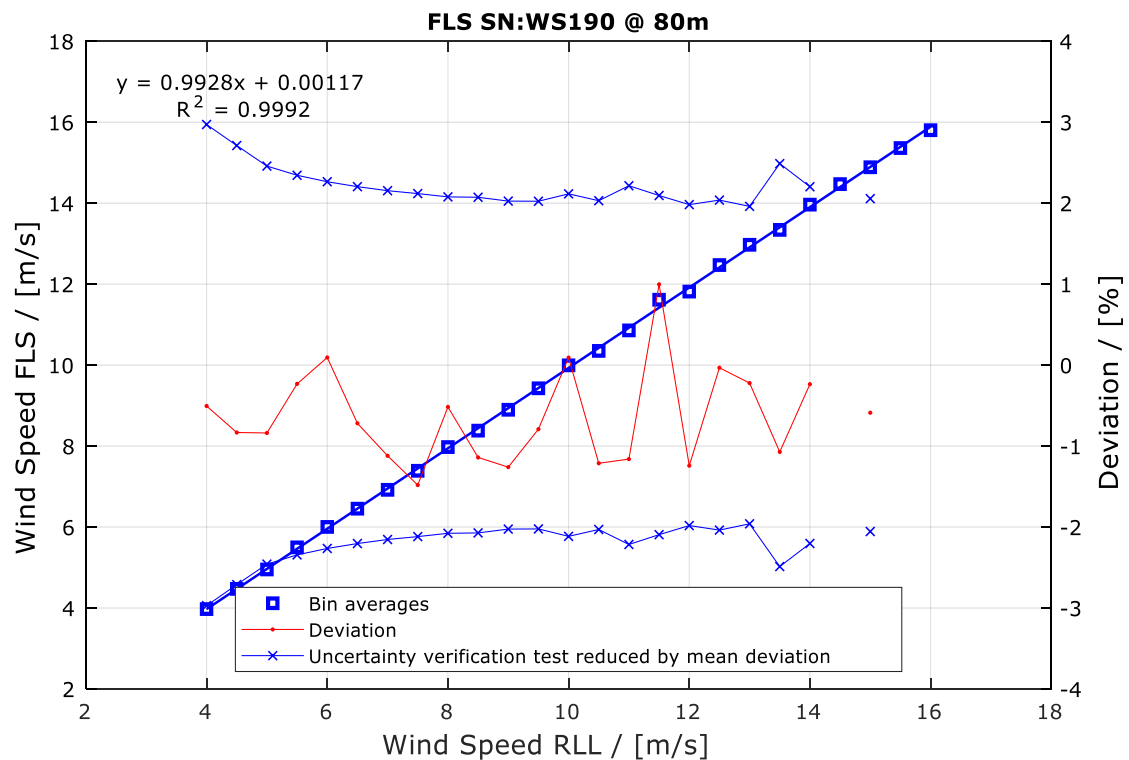


Figure 8: Bin-wise comparison of the horizontal wind speed component at 80 m

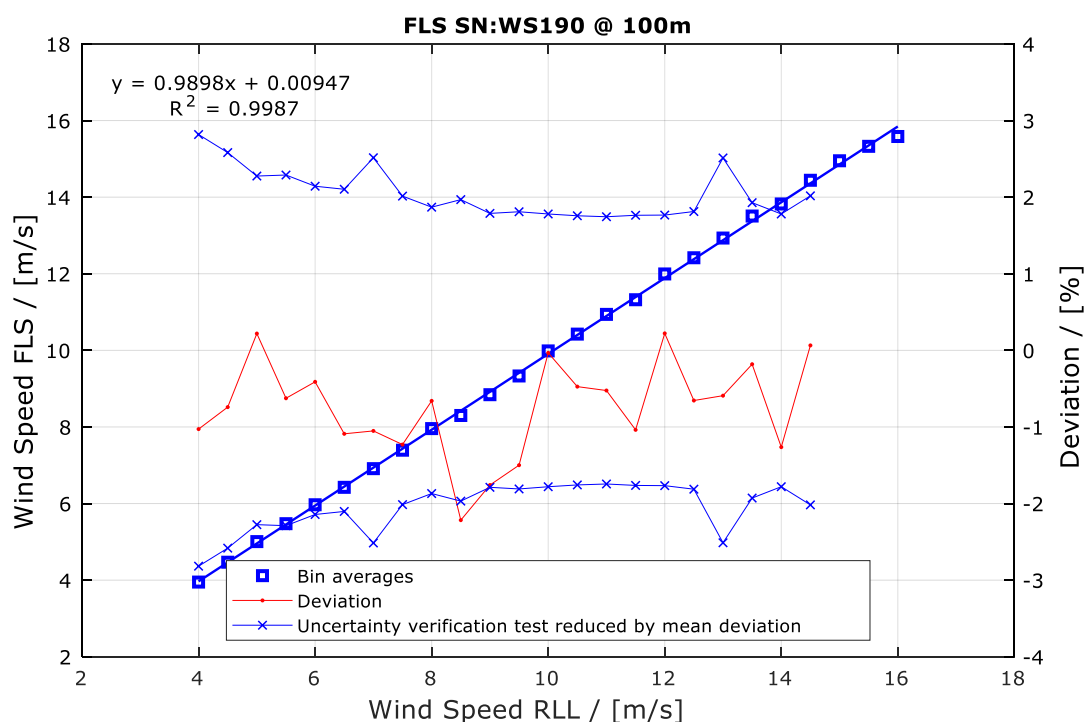


Figure 9: Bin-wise comparison of the horizontal wind speed component at 100 m

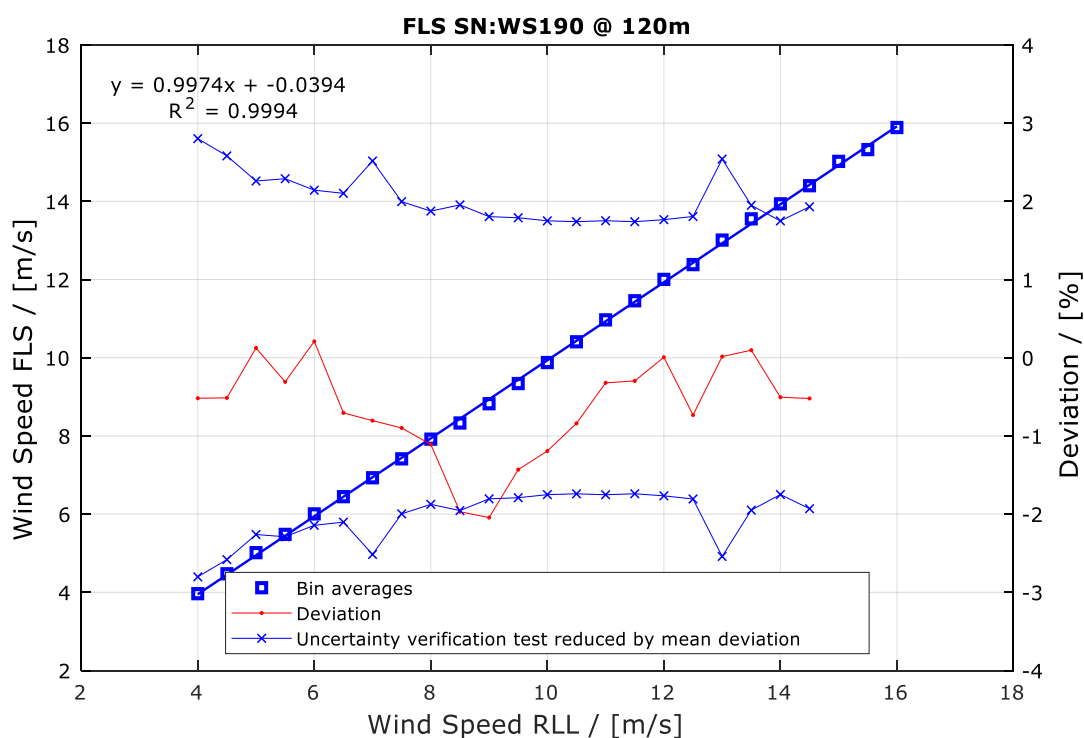



Figure 10: Bin-wise comparison of the horizontal wind speed component at 120 m



According to L.4.3 of the IEC standard [10] and RP 105+Note 32 of [12] , the verification uncertainty consists of the following independent uncertainty components:

1. Reference Lidar uncertainty,
2. Mean deviation of the remote sensor measurements and the reference measurements,
3. Standard uncertainty of the measurement of the remote sensing device,
4. Mounting uncertainty of the remote sensor at the verification test,
5. Uncertainty due to non-homogenous flow,
6. Uncertainty due to separation distance from FLS to RLL.

The different uncertainty components are added in quadrate for each wind speed bin. Details on the calculation of the separate uncertainty components are described in Appendix D.

The results of the uncertainty calculation for the IEC compliant verification of the LiDAR device at every comparison level are plotted in Table 9 to Table 12. For all assessed levels the combined uncertainties of the floating lidar system (V_{RSD}) at hand show result values well below 3% within most of the bins.

DNV GL notes that the bin sizes and bin limits according to the OWA Roadmap [1] are different to the IEC [10]. Since the uncertainty components of the RLL verification [4] are based on the IEC bin definition, the uncertainty estimation for this FLS verification has been done according to the IEC bin definition as well.

Table 9: Uncertainty calculation for 60 m level

Height level 60 m													
BIN lower [m/s]	BIN upper [m/s]	# of 10 min data sets	V _{rds} [m/s]	V _{mm} [m/s]	V _{maxrds} [m/s]	V _{minrds} [m/s]	Std _{Vrds} [m/s]	Std _{Vrds} /Vn [m/s]	Mean deviation [%]	RSD Mounting uncertainty [%]	Separation Uncertainty [%]	V _{RL} Uncertainty [%]	V _{rds} Uncertainty (k=1) [%]
3.75	4.25	79	4.15	4.02	6.21	3.11	0.59	0.066	3.14%	0.50%	0.49%	2.56%	4.42%
4.25	4.75	119	4.72	4.50	7.40	3.71	0.50	0.046	5.09%	0.50%	0.49%	2.39%	5.75%
4.75	5.25	108	5.10	5.00	7.88	3.53	0.48	0.047	2.07%	0.50%	0.49%	2.25%	3.26%
5.25	5.75	94	5.58	5.52	6.86	4.66	0.42	0.043	1.03%	0.50%	0.49%	2.11%	2.57%
5.75	6.25	90	5.95	5.95	8.17	4.36	0.57	0.060	-0.07%	0.50%	0.49%	2.13%	2.46%
6.25	6.75	86	6.50	6.51	7.64	4.78	0.54	0.059	-0.15%	0.50%	0.49%	1.97%	2.28%
6.75	7.25	65	7.05	7.02	8.53	5.73	0.48	0.059	0.46%	0.50%	0.49%	1.92%	2.26%
7.25	7.75	52	7.49	7.46	8.41	6.63	0.42	0.058	0.45%	0.50%	0.49%	1.90%	2.22%
7.75	8.25	53	8.16	7.99	8.89	7.46	0.33	0.046	2.06%	0.50%	0.49%	1.86%	2.92%
8.25	8.75	60	8.56	8.49	9.13	7.94	0.28	0.037	0.78%	0.50%	0.49%	1.80%	2.12%
8.75	9.25	64	9.12	9.00	10.79	8.35	0.36	0.045	1.34%	0.50%	0.49%	1.80%	2.40%
9.25	9.75	39	9.67	9.52	10.56	8.89	0.34	0.054	1.57%	0.50%	0.49%	1.93%	2.65%
9.75	10.25	29	10.07	9.97	10.62	9.31	0.30	0.057	1.01%	0.50%	0.49%	1.90%	2.33%
10.25	10.75	19	10.65	10.51	11.45	10.08	0.32	0.072	1.34%	0.50%	0.49%	2.05%	2.64%
10.75	11.25	17	11.19	11.03	11.87	10.50	0.40	0.097	1.39%	0.50%	0.49%	1.87%	2.58%
11.25	11.75	18	11.88	11.53	12.70	11.03	0.46	0.108	3.05%	0.50%	0.49%	1.76%	3.70%
11.75	12.25	17	12.23	12.03	13.42	11.63	0.41	0.100	1.70%	0.50%	0.49%	1.83%	2.72%
12.25	12.75	20	12.51	12.44	13.71	11.69	0.49	0.109	0.57%	0.50%	0.49%	2.02%	2.38%
12.75	13.25	11	13.36	13.11	14.25	12.58	0.50	0.152	1.90%	0.50%	0.49%	1.59%	2.81%
13.25	13.75	12											
13.75	14.25	10											
14.25	14.75	4	14.65	14.49	15.02	14.13	0.39	0.194	1.14%	0.50%	0.49%	2.26%	2.94%
14.75	15.25	2											
15.25	15.75	1											
15.75	16.25	1											

Table 10: Uncertainty calculation for 80 m level

Height level 80 m													
BIN lower [m/s]	BIN upper [m/s]	# of 10 min data sets	V _{rds} [m/s]	V _{mm} [m/s]	V _{maxrds} [m/s]	V _{minrds} [m/s]	Std _{Vrds} [m/s]	Std _{Vrds} /√n [m/s]	Mean deviation [%]	RSD Mounting uncertainty [%]	Separation Uncertainty [%]	V _{RL} Uncertainty [%]	V _{rds} Uncertainty (k=1) [%]
3.75	4.25	278	3.97	3.99	6.45	2.10	0.48	0.029	-0.51%	0.50%	0.49%	2.85%	3.06%
4.25	4.75	316	4.47	4.51	5.55	1.80	0.42	0.024	-0.83%	0.50%	0.49%	2.62%	2.88%
4.75	5.25	339	4.95	4.99	6.92	3.17	0.40	0.022	-0.84%	0.50%	0.49%	2.37%	2.65%
5.25	5.75	324	5.50	5.51	6.80	3.83	0.38	0.021	-0.23%	0.50%	0.49%	2.26%	2.41%
5.75	6.25	348	6.00	6.00	8.89	4.30	0.39	0.021	0.09%	0.50%	0.49%	2.18%	2.32%
6.25	6.75	324	6.45	6.50	7.70	4.84	0.44	0.025	-0.72%	0.50%	0.49%	2.12%	2.37%
6.75	7.25	272	6.92	7.00	9.31	5.02	0.48	0.029	-1.12%	0.50%	0.49%	2.06%	2.48%
7.25	7.75	224	7.39	7.50	9.66	5.08	0.57	0.038	-1.48%	0.50%	0.49%	2.00%	2.64%
7.75	8.25	186	7.97	8.02	9.25	6.74	0.48	0.035	-0.52%	0.50%	0.49%	1.97%	2.20%
8.25	8.75	158	8.38	8.48	11.21	6.68	0.54	0.043	-1.14%	0.50%	0.49%	1.95%	2.42%
8.75	9.25	167	8.90	9.01	12.28	7.46	0.54	0.042	-1.26%	0.50%	0.49%	1.91%	2.44%
9.25	9.75	132	9.43	9.50	10.91	8.17	0.46	0.040	-0.79%	0.50%	0.49%	1.92%	2.23%
9.75	10.25	91	9.99	9.99	11.87	8.65	0.52	0.054	0.09%	0.50%	0.49%	1.99%	2.18%
10.25	10.75	72	10.35	10.48	13.24	9.07	0.59	0.070	-1.21%	0.50%	0.49%	1.86%	2.42%
10.75	11.25	72	10.86	10.98	11.87	9.78	0.47	0.056	-1.16%	0.50%	0.49%	2.10%	2.55%
11.25	11.75	48	11.61	11.50	13.54	10.44	0.60	0.086	1.00%	0.50%	0.49%	1.90%	2.37%
11.75	12.25	51	11.82	11.96	12.70	10.74	0.46	0.064	-1.24%	0.50%	0.49%	1.84%	2.39%
12.25	12.75	63	12.47	12.48	14.31	11.39	0.56	0.070	-0.03%	0.50%	0.49%	1.90%	2.10%
12.75	13.25	56	12.97	13.00	14.01	11.81	0.46	0.061	-0.22%	0.50%	0.49%	1.84%	2.04%
13.25	13.75	53	13.34	13.48	14.55	12.17	0.57	0.078	-1.07%	0.50%	0.49%	2.37%	2.76%
13.75	14.25	52	13.96	14.00	15.98	12.46	0.72	0.100	-0.24%	0.50%	0.49%	2.03%	2.27%
14.25	14.75	34											
14.75	15.25	26	14.89	14.98	16.04	14.01	0.48	0.094	-0.59%	0.50%	0.49%	1.90%	2.20%
15.25	15.75	20											
15.75	16.25	18											

Table 11: Uncertainty calculation for 100 m level

Height level 100 m													
BIN lower [m/s]	BIN upper [m/s]	# of 10 min data sets	V _{rsd} [m/s]	V _{mm} [m/s]	V _{maxrsd} [m/s]	V _{minrsd} [m/s]	Std _{Vrsd} [m/s]	Std _{Vrsd} /√n [m/s]	Mean deviation [%]	RSD Mounting uncertainty [%]	Separation Uncertainty [%]	V _{RL} Uncertainty [%]	V _{RSD} Uncertainty (k=1) [%]
3.75	4.25	255	3.95	3.99	5.67	1.86	0.42	0.026	-1.03%	0.50%	0.49%	2.70%	3.05%
4.25	4.75	282	4.47	4.50	6.51	3.41	0.40	0.024	-0.74%	0.50%	0.49%	2.48%	2.74%
4.75	5.25	347	5.01	5.00	7.46	3.35	0.44	0.024	0.22%	0.50%	0.49%	2.17%	2.34%
5.25	5.75	302	5.47	5.51	6.80	4.24	0.33	0.019	-0.63%	0.50%	0.49%	2.21%	2.43%
5.75	6.25	322	5.97	5.99	7.16	3.71	0.40	0.022	-0.41%	0.50%	0.49%	2.05%	2.24%
6.25	6.75	313	6.42	6.49	7.94	5.02	0.37	0.021	-1.09%	0.50%	0.49%	2.02%	2.42%
6.75	7.25	283	6.91	6.99	7.94	5.61	0.43	0.026	-1.05%	0.50%	0.49%	2.44%	2.77%
7.25	7.75	191	7.39	7.49	9.42	5.55	0.54	0.039	-1.23%	0.50%	0.49%	1.89%	2.41%
7.75	8.25	186	7.96	8.01	10.38	6.86	0.45	0.033	-0.66%	0.50%	0.49%	1.76%	2.04%
8.25	8.75	171	8.30	8.49	10.20	6.27	0.50	0.038	-2.22%	0.50%	0.49%	1.85%	3.01%
8.75	9.25	176	8.84	9.00	9.90	7.64	0.44	0.033	-1.76%	0.50%	0.49%	1.68%	2.56%
9.25	9.75	143	9.33	9.47	13.12	7.76	0.56	0.047	-1.50%	0.50%	0.49%	1.67%	2.40%
9.75	10.25	82	9.99	9.99	11.39	9.01	0.44	0.049	-0.03%	0.50%	0.49%	1.64%	1.85%
10.25	10.75	104	10.42	10.47	12.17	9.37	0.48	0.048	-0.47%	0.50%	0.49%	1.63%	1.89%
10.75	11.25	80	10.94	11.00	12.82	9.66	0.52	0.059	-0.52%	0.50%	0.49%	1.59%	1.89%
11.25	11.75	53	11.32	11.44	12.94	10.08	0.48	0.066	-1.04%	0.50%	0.49%	1.60%	2.11%
11.75	12.25	49	11.99	11.97	14.01	11.09	0.55	0.079	0.22%	0.50%	0.49%	1.57%	1.85%
12.25	12.75	53	12.42	12.50	14.31	11.09	0.60	0.083	-0.65%	0.50%	0.49%	1.62%	1.99%
12.75	13.25	58	12.93	13.01	14.67	11.69	0.58	0.076	-0.59%	0.50%	0.49%	2.39%	2.63%
13.25	13.75	63	13.51	13.53	14.67	12.40	0.47	0.059	-0.18%	0.50%	0.49%	1.81%	2.00%
13.75	14.25	60	13.82	14.00	14.85	12.64	0.58	0.075	-1.26%	0.50%	0.49%	1.63%	2.24%
14.25	14.75	39	14.44	14.43	16.22	13.36	0.71	0.114	0.06%	0.50%	0.49%	1.80%	2.08%
14.75	15.25	36											
15.25	15.75	24											
15.75	16.25	18											

Table 12: Uncertainty calculation for 120 m level

Height level 120 m													
BIN lower [m/s]	BIN upper [m/s]	# of 10 min data sets	V _{rds} [m/s]	V _{mm} [m/s]	V _{maxrds} [m/s]	V _{minrds} [m/s]	Std _{Vrds} [m/s]	Std _{Vrds} /√n [m/s]	Mean deviation [%]	RSD Mounting uncertainty [%]	Separation Uncertainty [%]	V _{RLL} Uncertainty [%]	V _{RSD} Uncertainty (k=1) [%]
3.75	4.25	266	3.97	3.99	6.21	1.92	0.38	0.023	-0.52%	0.50%	0.49%	2.70%	2.90%
4.25	4.75	264	4.47	4.50	6.51	3.29	0.38	0.024	-0.51%	0.50%	0.49%	2.48%	2.68%
4.75	5.25	314	5.01	5.01	5.91	3.11	0.34	0.019	0.12%	0.50%	0.49%	2.17%	2.32%
5.25	5.75	305	5.48	5.50	6.74	3.94	0.34	0.019	-0.31%	0.50%	0.49%	2.21%	2.36%
5.75	6.25	317	6.01	5.99	7.82	4.24	0.40	0.022	0.21%	0.50%	0.49%	2.05%	2.21%
6.25	6.75	316	6.45	6.49	7.58	5.14	0.37	0.021	-0.71%	0.50%	0.49%	2.02%	2.27%
6.75	7.25	268	6.93	6.99	8.23	4.66	0.43	0.026	-0.80%	0.50%	0.49%	2.44%	2.69%
7.25	7.75	185	7.41	7.48	8.47	5.85	0.45	0.033	-0.90%	0.50%	0.49%	1.89%	2.25%
7.75	8.25	184	7.92	8.01	9.31	6.39	0.48	0.035	-1.11%	0.50%	0.49%	1.76%	2.24%
8.25	8.75	162	8.33	8.50	9.48	6.98	0.41	0.033	-1.97%	0.50%	0.49%	1.85%	2.82%
8.75	9.25	157	8.82	9.01	9.90	6.98	0.50	0.040	-2.04%	0.50%	0.49%	1.68%	2.77%
9.25	9.75	140	9.34	9.48	10.62	7.76	0.47	0.039	-1.43%	0.50%	0.49%	1.67%	2.35%
9.75	10.25	101	9.88	10.00	11.33	8.95	0.36	0.036	-1.19%	0.50%	0.49%	1.64%	2.18%
10.25	10.75	97	10.41	10.50	12.11	9.42	0.39	0.040	-0.84%	0.50%	0.49%	1.63%	2.00%
10.75	11.25	88	10.97	11.00	14.01	9.78	0.58	0.061	-0.32%	0.50%	0.49%	1.59%	1.85%
11.25	11.75	88	11.46	11.49	13.48	10.08	0.53	0.056	-0.30%	0.50%	0.49%	1.60%	1.83%
11.75	12.25	41	12.00	12.00	13.06	11.03	0.51	0.079	0.01%	0.50%	0.49%	1.57%	1.84%
12.25	12.75	43	12.38	12.47	13.71	11.03	0.53	0.080	-0.73%	0.50%	0.49%	1.62%	2.02%
12.75	13.25	47	13.01	13.01	14.79	11.99	0.63	0.091	0.01%	0.50%	0.49%	2.39%	2.59%
13.25	13.75	59	13.55	13.54	14.96	12.28	0.54	0.071	0.10%	0.50%	0.49%	1.81%	2.01%
13.75	14.25	74	13.94	14.01	15.20	12.64	0.51	0.059	-0.51%	0.50%	0.49%	1.63%	1.89%
14.25	14.75	54	14.40	14.48	16.28	13.42	0.54	0.074	-0.52%	0.50%	0.49%	1.80%	2.06%
14.75	15.25	33											
15.25	15.75	36											
15.75	16.25	22											

5 REMARKS AND LIMITATIONS

5.1 General

The presented results have to be regarded under the following reservations and limitations:

- Both data sets, the one for the Reference Land Lidar (RLL) and the one for the SWLB were visible to Fugro, i.e., they've had full access to the data from the tested device and the reference data. However, DNV GL has received the .ZPH data of the Reference Land Lidar (RLL) directly from the FTP server from Fugro.
- All conclusions on the capabilities of the SWLB drawn from this Frøya pre-deployment verification campaign are valid under sea states and meteorological conditions similar to those experienced during this trial, only.

5.2 Pre- and Post-Deployment Verification

In general, DNV GL recommends that an FLS unit undergoes a pre-deployment verification test no greater than one year before its application deployment.

A post-deployment verification of a FLS can be necessary, in case of e.g.


- Inconsistencies in the data time series or the operation of the buoy being observed
- known or assumed incidents to the buoy or FLS measurement system

during wind resource measurement campaign. Otherwise, a pre-deployment verification campaign may be considered sufficient.

5.3 Design Specifics of WS190

DNV GL has been informed by Fugro that this buoy WS190 has received design changes compared to the unit trialed in the FLS type verification at IJmuiden in 2014/2015 [6] with regards to using a marinized version of the employed ZX300 type Lidar (1), by adding extra buoyancy to the buoy assembly (2) and (3) adding DGPS heading source.

- (1) The ZX Lidars ZX300 Lidar with S/N ZX843 used on the buoy is a marinized version with improved connectors, i.e., more corrosion resistant materials have been used compared to the standard onshore type. DNV GL considers that this will not affect the quality of wind data measured by the Lidar.
- (2) The buoy assembly has been supplied with an extra buoyancy ring. DNV GL has performed a high-level desktop assessment of the change in buoy design with regards to motion in response to waves and currents, based on drawings of the new buoy design provided by Fugro [7]. As a result, based on this documentation DNV GL considers the change negligible for motion types like rotation, pitch, and roll. The motion damping seems to be improved. Based on the documentation of the change available to DNV GL and noticing that the anchoring and mooring array design has properly been adapted and reviewed by Fugro in response to changes of weight, total buoyancy, and size, and therefore for wave loadings as documented in Fugro's internal mooring design report no. C75342-02-03 [8], DNV GL considers that the statements with regards to wind data quality and data availability given for the former (original) buoy design in



relation to the Roadmap-related achievements [1, 6] should as well hold for the new buoy design. DNV GL's consideration is supported by the fact that a Seawatch Wind Lidar buoy with extra buoyancy has undergone a second 6-month type validation at the East Anglia (EA1) Met Mast in the UK in 2015-16 organized by Carbon Trust. The assessment was done by Natural Power [9].

- (3) In addition to the (type validated) magnetic compass heading source, a DGPS heading source was implemented by Fugro as additional feature which is assumed to improve the performance. According to previous SWLB pre-deployment validations where both heading sources were available and evaluated by DNV GL, it can be confirmed that the performance with DGPS is the same or better than using magnetic compass correction.

6 CONCLUSIONS ON SWL BUOY TECHNOLOGY IN CONTEXT OF COMMERCIAL ROADMAP

An evaluation of the Fugro Seawatch Wind Lidar Buoy floating LiDAR system was completed by comparing its measurements against data of a Reference Land Lidar installed on the Island Frøya in the Norwegian Sea. Sufficient data regarding WS data completeness and coverage were collected to allow an assessment in line with the Roadmap for commercialization of Floating Lidar Devices [1].

DNV GL concludes that the Fugro SWLB unit with the S/N WS190 has demonstrated its capability to produce accurate wind speed and direction data across the range of sea states and meteorological conditions experienced in this trial. I.e., the Buoy recorded significant wave heights of up to 2.49 m (and 4.3 m for maximum wave height). The RLL wind speeds recorded at Frøya covered a range of up to 15.2 m/s at 40 m and 24.2 m/s at 250 m.

The assessments of the Roadmap KPIs for the complete data set (from 2019-04-02 until 2019-05-09) show that all FLS-Roadmap Acceptance Criteria for wind speed are met at heights between 40 and 250 m and all FLD-Roadmap Acceptance Criteria for wind directions are met at heights between 40 and 250 m, passing best practice or minimum CT Roadmap acceptance criteria.

7 REFERENCES

- [1] Carbon Trust Offshore Wind Accelerator roadmap for the commercial acceptance of floating LIDAR technology. Version 2.0, The Carbon Trust, 9. October 2018.
- [2] DNV GL Report GLGH-4257 13 10378 266-R-0002 Issue B , "A ROADMAP FOR THE COMMERCIAL ACCEPTANCE OF THE FUGRO/OCEANOR SEAWATCH WIND LIDAR BUOY", dated 2015-01-29.
- [3] DNV GL Report GLGH-4275 13 10378 271-T-0003-A, "Technical note for inspection of Reference Land Lidar at Frøya", August 2017.
- [4] DNV GL Report GLGH-4275 17 14682 271-R-0004-A, "ZP495 Independent analysis and reporting of ZephIR Lidar performance verification executed by ZephIR Ltd. at Pershore test site including IEC compliant validation analysis", dated 2017-10-13
- [5] DNV GL Report 10108274-R-38-A, "ZX843 Independent analysis and reporting of ZX Lidars performance verification executed by ZephIR Ltd. at Pershore test site, including IEC compliant" dated 2019-05-22.
- [6] DNV GL Report GLGH-4257 13 10378 266-R-0003 Issue B , "ASSESSMENT OF THE FUGRO/OCEANOR SEAWATCH FLOATING LIDAR VERIFICATION AT RWE IJMUIDEN MET MAST", dated 2015-01-30.
- [7] Arve Berg, Fugro OCEANOR Report , "EXTRA BUOYANCY LIDAR BUOY - IMPLEMENTATION", dated 2015-05-05.
- [8] Fredrik Dessen, Fugro OCEANOR Mooring design report No. C75342-02-03, "Lidar for Carbon Trust Wavescan hull with extra buoyancy", dated 2015-06-12
- [9] Andreas Athanasopoulos & Andy Cheng: Floating Lidar Validation Analysis SEAWATCH Wind Lidar Buoy. Natural Power, 7th December 2016
- [10] International Standard: IEC 61400-12-1: Wind turbines – Part 12-1: Power performance measurements of electricity producing wind turbines. Ed. 2., Apr. 2017
- [11] OWA Report 2017-001: Lidar Uncertainty Standard Review Methodology Review and Recommendations, June 2018
(https://www.carbontrust.com/media/676998/owa-w-lusr_nov-2018.pdf)
- [12] IEA Wind Recommended Practice 18: Floating Lidar Systems, First Edition, September 2017

APPENDIX A – APPLIED KEY PERFORMANCE INDICATORS AND ACCEPTANCE CRITERIA FOR FLS PRE-DEPLOYMENT VALIDATION

Wind Data Accuracy assessment

The KPIs and Acceptance Criteria relating to accuracy are defined in the following table. To assess the accuracy a statistical linear regression approach has been selected which is based on:

- a) a two variant regression $y = mx+b$ (with m slope and b offset) to be applied to wind direction data comparisons between floating instrument and the reference; and,
- b) a single variant regression, with the regression analysis constrained to pass through origin ($y = mx+b$; $b = 0$) to be applied to wind speed, turbulence intensity and wind shear data comparisons between floating instrument and the reference.


In addition, Acceptance Criteria in the form of “best practise” and “minimum” allowable tolerances have been imposed on slope and offset values as well as on coefficient of determination returned from each reference height for KPIs related to the primary parameters of interest; wind speed and wind direction.

KPI	Definition / Rationale	Acceptance Criteria	
		Best Practice	Minimum
X_{mws}	Mean Wind Speed – Slope Slope returned from single variant regression with the regression analysis constrained to pass through the origin. A tolerance is imposed on the Slope value. Analysis shall be applied to wind speed range <ol style="list-style-type: none"> a) all above 2 m/s b) 4 – 16 m/s given achieved data coverage requirements.	0.98 – 1.02	0.97 – 1.03
R^2_{mws}	Mean Wind Speed – Coefficient of Determination Coefficient returned from single variant regression A tolerance is imposed on the Coefficient value. Analysis shall be applied to wind speed range <ol style="list-style-type: none"> a) all above 2 m/s b) 4 – 16 m/s given achieved data coverage requirements.	>0.98	>0.97


KPI	Definition / Rationale	Acceptance Criteria	
		Best Practice	Minimum
M_{mwd}	Mean Wind Direction – Slope Slope returned from a two-variant regression. A tolerance is imposed on the Slope value. Analysis shall be applied to <ul style="list-style-type: none"> a) all wind directions b) all wind speeds above 2 m/s regardless of coverage requirements.	0.97 – 1.03	0.95 – 1.05
OFF_{mwd}	Mean Wind Direction – Offset, in terms of the mean WD difference over the total campaign duration (same as for M_{mwd})	< 5°	< 10°
R^2_{mwd}	Mean Wind Direction – Coefficient of Determination (same as for M_{mwd})	> 0.97	> 0.95

APPENDIX B – CAMPAIGN METEOROLOGICAL CONDITIONS, TIME SERIES AND WS/WD CORRELATION PLOTS


Polar plots of wind directions and wind speed for 250 m and 80 m comparison heights:

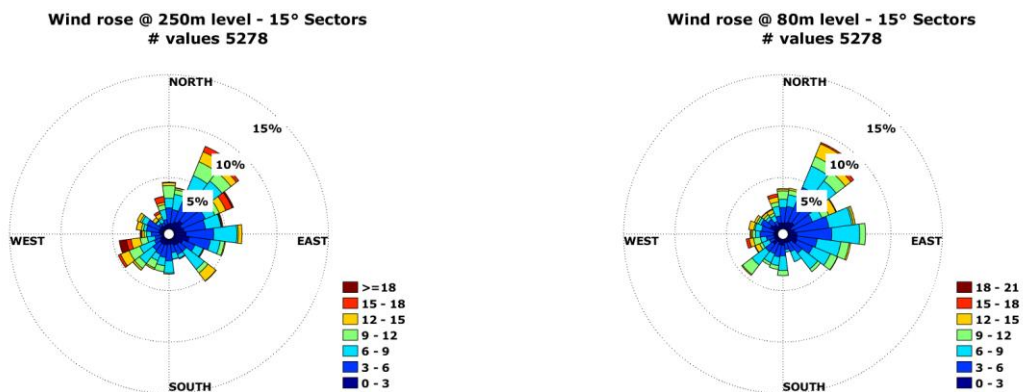







Time series of air temperature, Relative humidity and air pressure of RLL measurement:




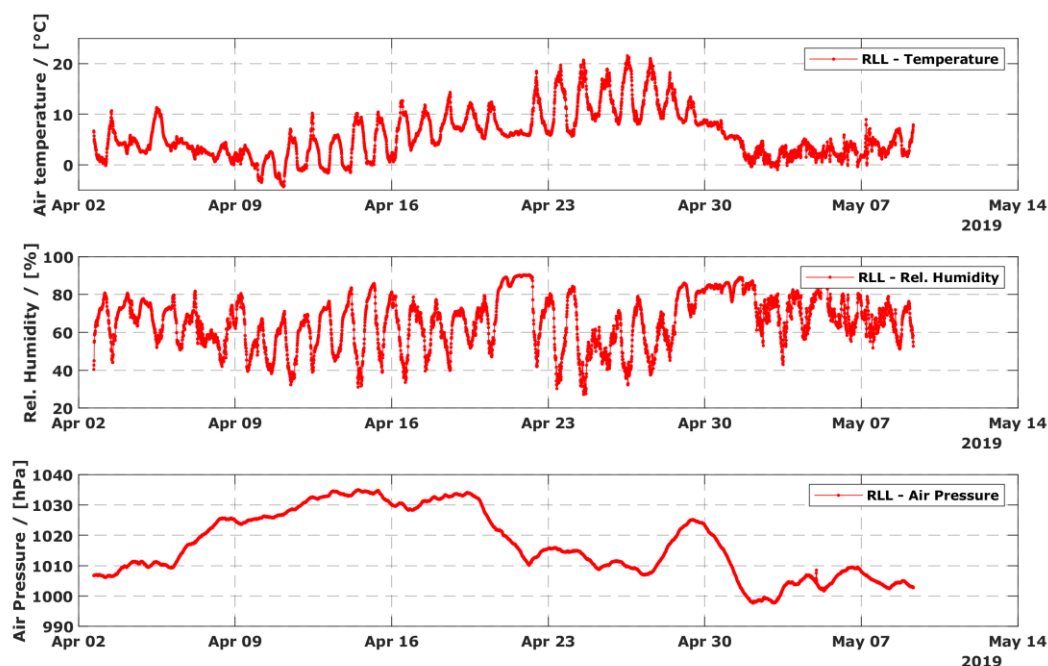


Wind speed and wind directions time series for 40 m and 250 m comparison heights:






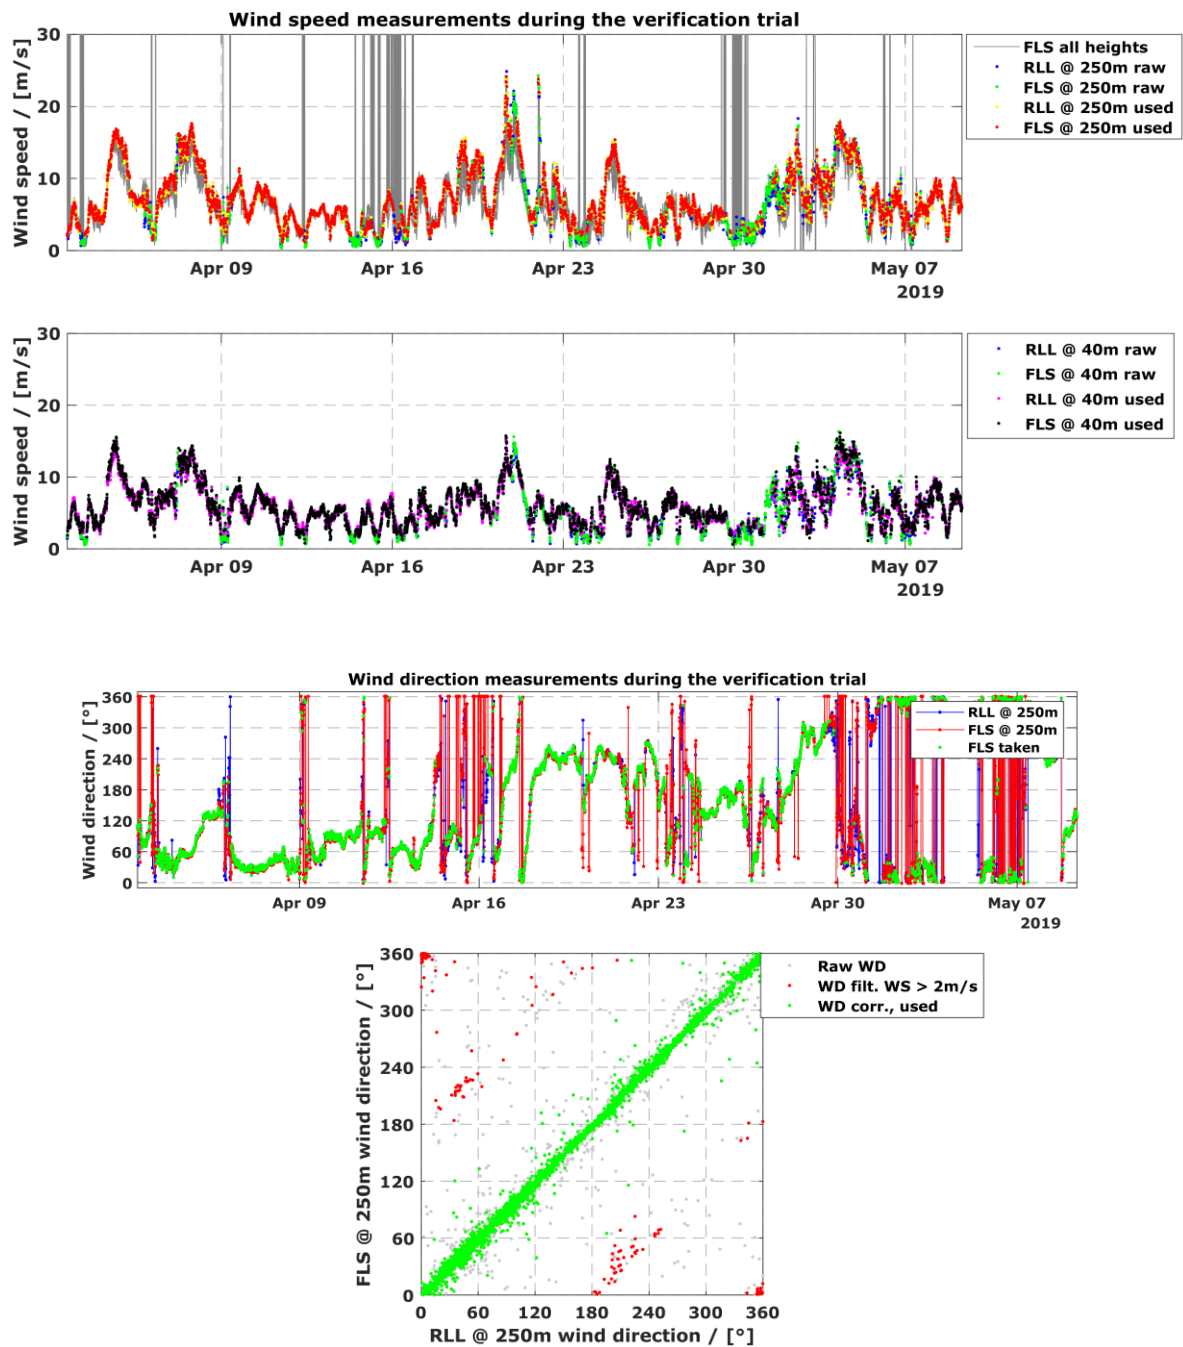






WS regression plots all selected comparison heights, i.e between 40 and 250 m above MSL

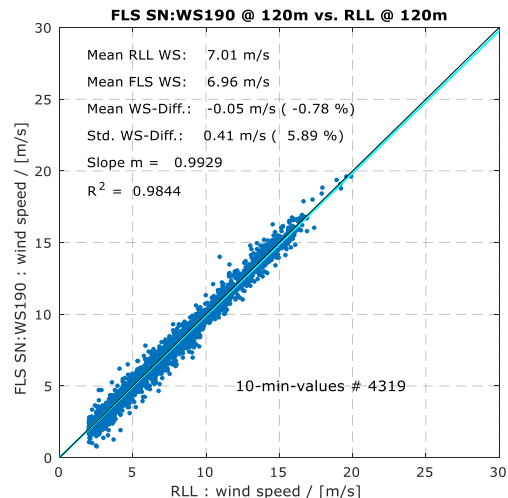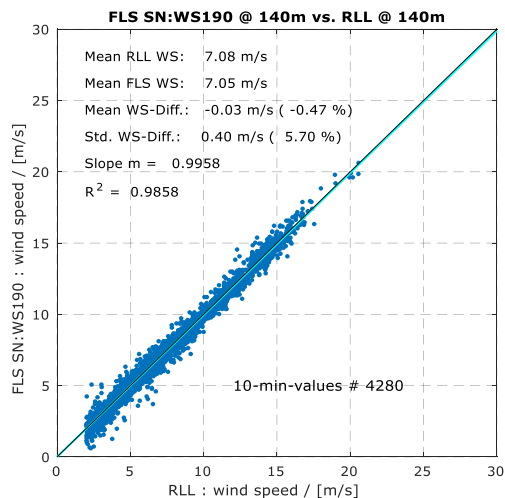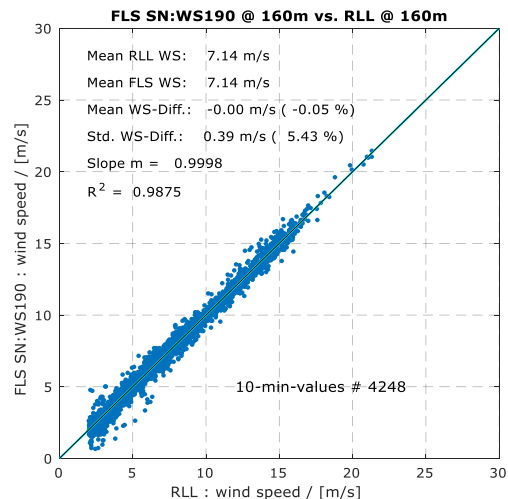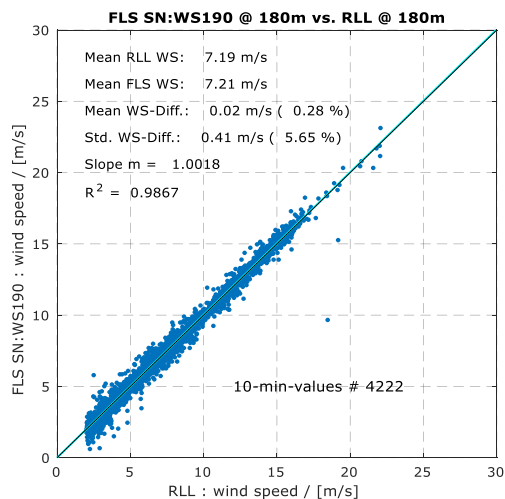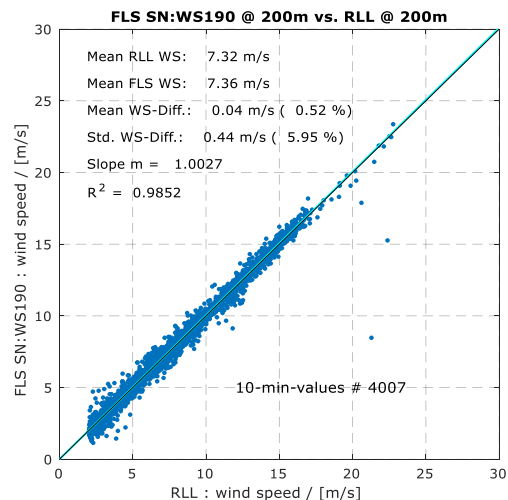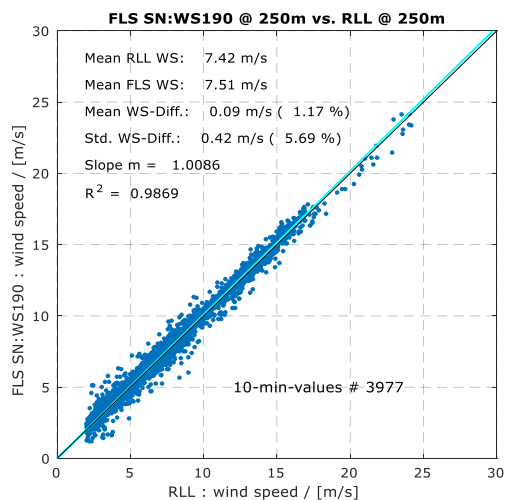

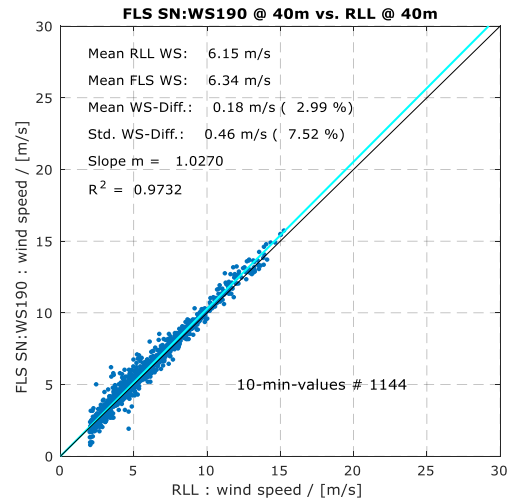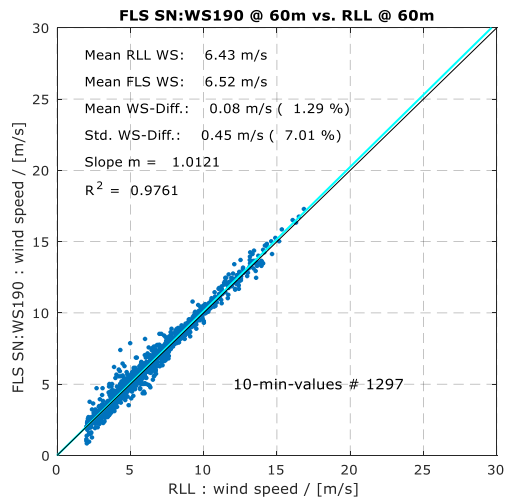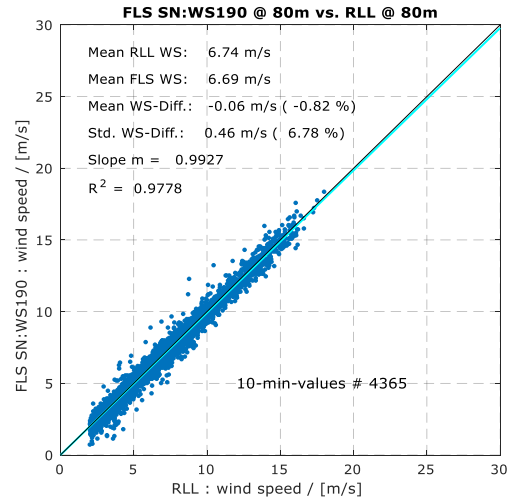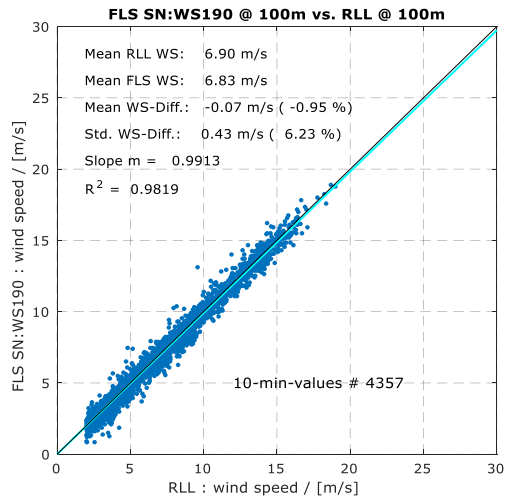

WD correlation plots for all selected comparison heights, i.e. between 40 m and 250 m above MSL

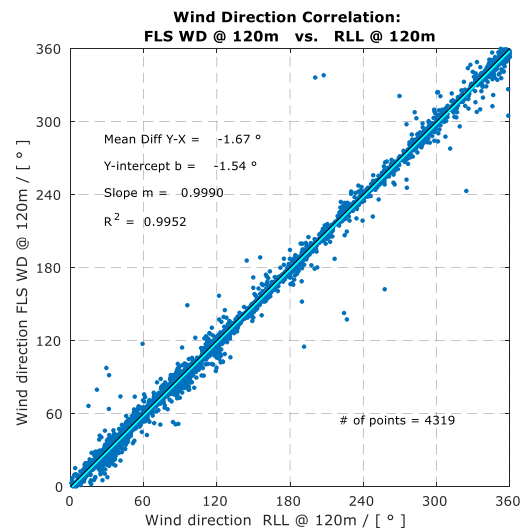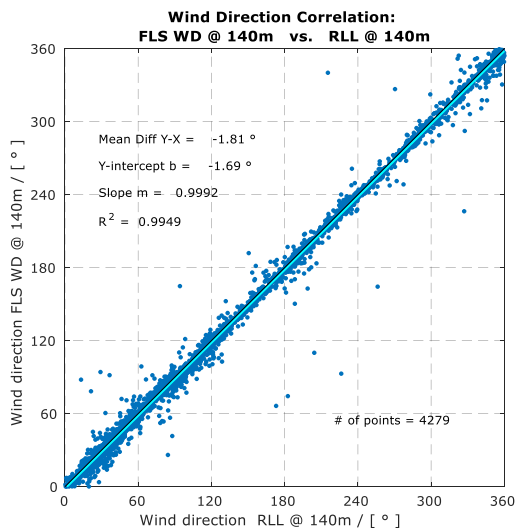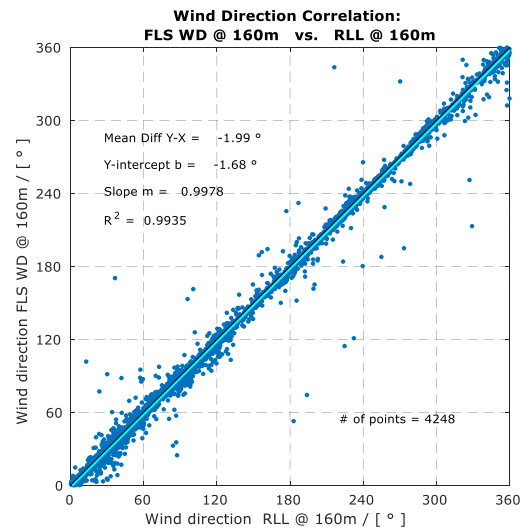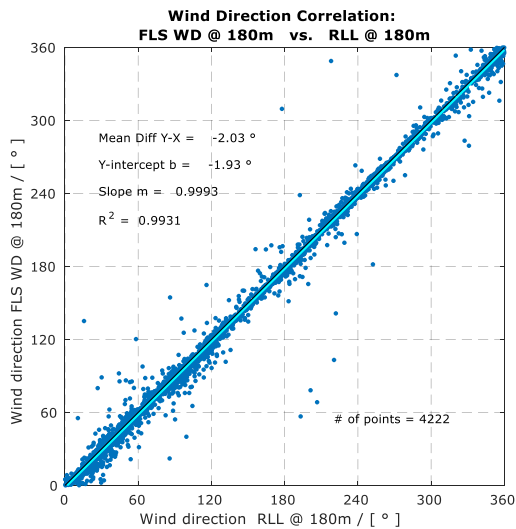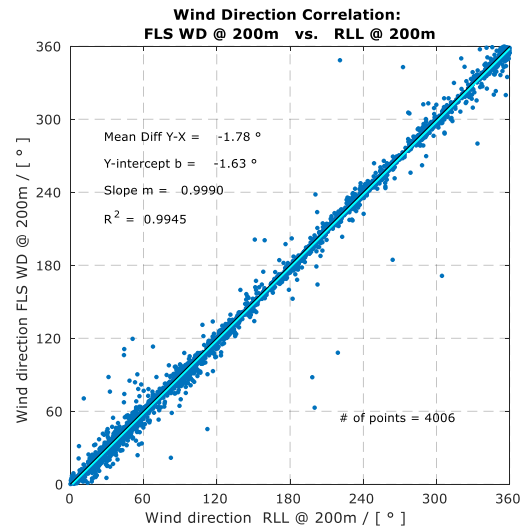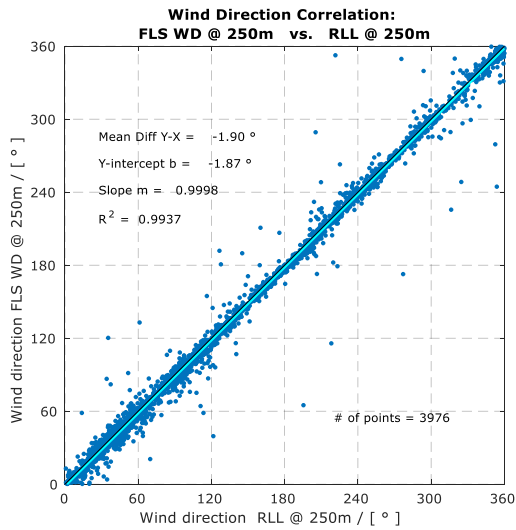

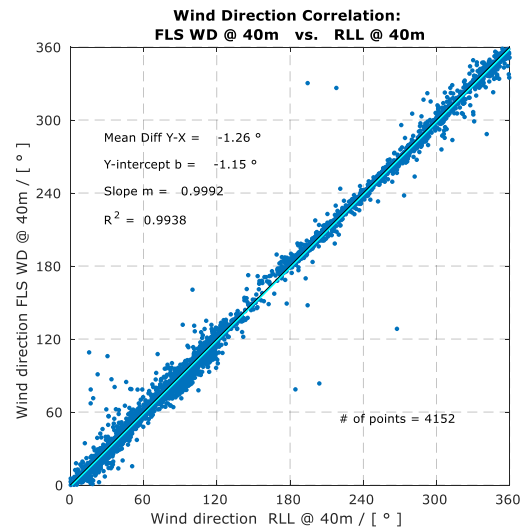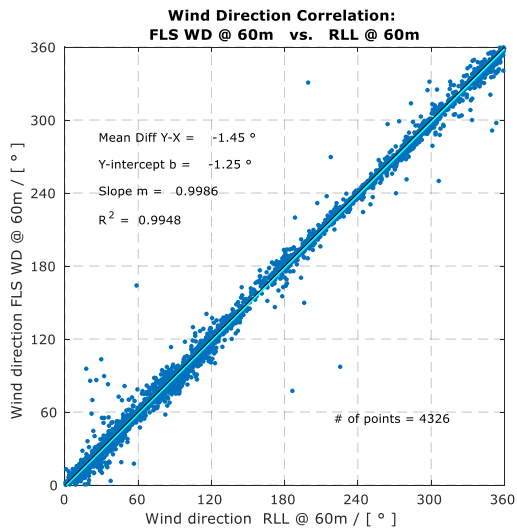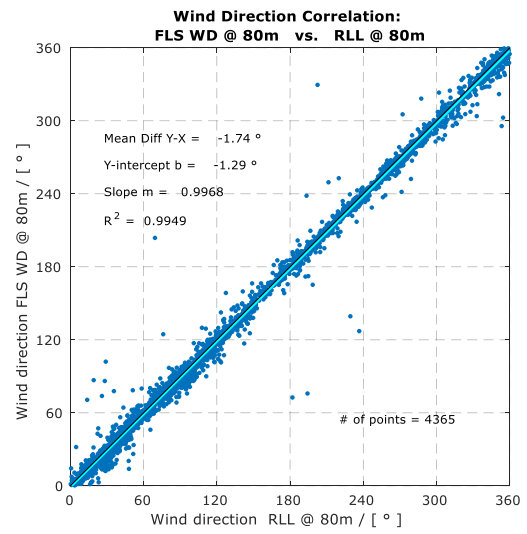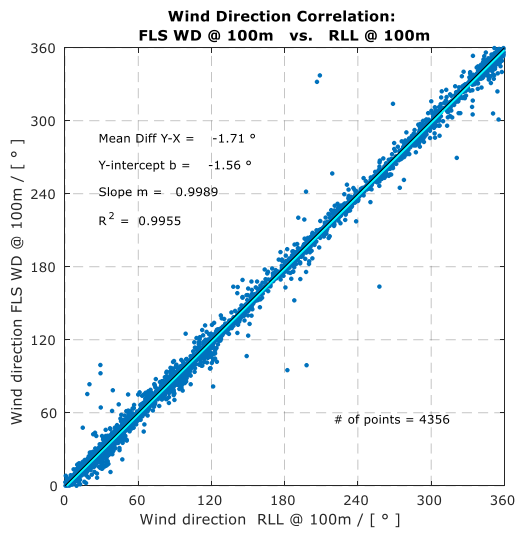

APPENDIX C – WAVES AND TIDES

Mean wave period and significant wave height distribution across total campaign period:


Joint occurrence of:																
Tm02 Mean wave period (Tm02) (s) Slettringen, SWLB WS190																
Hm0 Significant wave height (m) Slettringen, SWLB WS190																
Measuring depth: 0.00 m																
Water depth: 50.00 m																
Sampling interval: 10 min.																
Period 2019.04.02 16:30 - 2019.05.09 08:00																
Tm02 (s)	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SUM	% OF TOTAL
Hm0 (m)	3	4	5	6	7	8	9	10	11	12	13	14	15	16	SUM	% OF TOTAL
0.0 - 0.5	107	378	271	143	263	267	124	48	15	1					1617	30.7
0.5 - 1.0		122	317	608	569	372	471	206	71	9					2745	52
1.0 - 1.5			92	86	60	112	125	182	34						691	13.1
1.5 - 2.0			20	44	6	48	57	24	8						207	3.9
2.0 - 2.5				4	11										15	0.3
>= 2.5															0	0
SUM	107	500	700	885	909	799	777	460	128	9	1	0			5275	100
% OF TOTAL	2	9.5	13.3	16.8	17.2	15.1	14.7	8.7	2.4	0.2	0	0			100	
SUM ACCUM.	107	607	1307	2192	3101	3900	4677	5137	5265	5274	5275	5275			5275	
CUM. PROB.	0.0203	0.115	0.2477	0.4155	0.5878	0.7392	0.8865	0.9737	0.9979	0.9996	0.9998	0.9998			0.99981	
MIN. VALUE	0.19	0.16	0.16	0.14	0.14	0.16	0.23	0.25	0.33	0.53	0.49				0.14	
AVE. VALUE	0.29	0.41	0.63	0.73	0.65	0.72	0.8	0.91	0.88	0.68	0.49				0.69	
MAX. VALUE	0.39	0.88	1.78	2.14	2.49	1.71	1.88	1.86	1.65	0.78	0.49				2.49	
STD. DEV.	0.05	0.17	0.37	0.36	0.34	0.4	0.36	0.36	0.38	0.08	0				0.37	

Highest wave period and maximum wave height distribution across total campaign period:

Joint occurrence of:																
THmax Period of highest wave (s) Slettringen, SWLB WS190																
Hmax Maximum wave height (m) Slettringen, SWLB WS190																
Measuring depth: 0.00 m																
Water depth: 50.00 m																
Sampling interval: 10 min.																
Period 2019.04.02 16:30 - 2019.05.09 08:00																
THmax (s)	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SUM	% OF TOTAL
Hmax (m)	3	4	5	6	7	8	9	10	11	12	13	14	15	16	SUM	% OF TOTAL
0.0 - 0.5	1	1	1	3	8	17	26	25	15	10	10	7	5	52	181	4.1
0.5 - 1.0		5	21	31	83	212	422	468	333	243	198	65	25	32	2138	48.1
1.0 - 1.5			1	19	37	107	183	229	234	243	118	58	24	2	1255	28.2
1.5 - 2.0				7	19	56	53	49	74	92	77	47	21	4	500	11.2
2.0 - 2.5					16	32	43	27	35	49	32	22	9		267	6
2.5 - 3.0					5	10	7	14	15	17	12	3	2		85	1.9
3.0 - 3.5					1	3	8	3	4						19	0.4
3.5 - 4.0							2								2	0
4.0 - 4.5							2								2	0
>= 4.5															0	0
SUM	1	7	48	112	299	527	770	855	749	492	338	128	36	87	4449	100
% OF TOTAL	0	0.2	1.1	2.5	6.7	11.8	17.3	19.2	16.8	11.1	7.6	2.9	0.8	2	100	
SUM ACCUM.	1	8	56	168	467	994	1764	2619	3368	3860	4198	4326	4362	4449	4449	
CUM. PROB.	0.0002	0.0018	0.0126	0.0378	0.1049	0.2234	0.3964	0.5885	0.7569	0.8674	0.9434	0.9721	0.9802	0.9998	0.99978	
MIN. VALUE	0.41	0.33	0.39	0.35	0.33	0.35	0.35	0.37	0.37	0.39	0.39	0.35	0.35	0.35	0.33	
AVE. VALUE	0.41	0.76	1.12	1.4	1.35	1.22	1.04	1.08	1.19	1.17	1.07	1.11	0.83	0.56	1.13	
MAX. VALUE	0.41	1.04	1.94	3.08	3.47	4.32	3.32	3.22	2.92	2.94	2.63	2.81	1.76	2.28	4.32	
STD. DEV.	0	0.23	0.32	0.6	0.57	0.6	0.47	0.49	0.49	0.53	0.5	0.55	0.36	0.32	0.53	

Note that the number of Hmax observations is lower than the number of Hm0 observations. As of Fugro this is because the single waves can't be identified properly in nearly calm sea states.

Time series of tidal/water level at Mausund, Frøya over total campaign period:

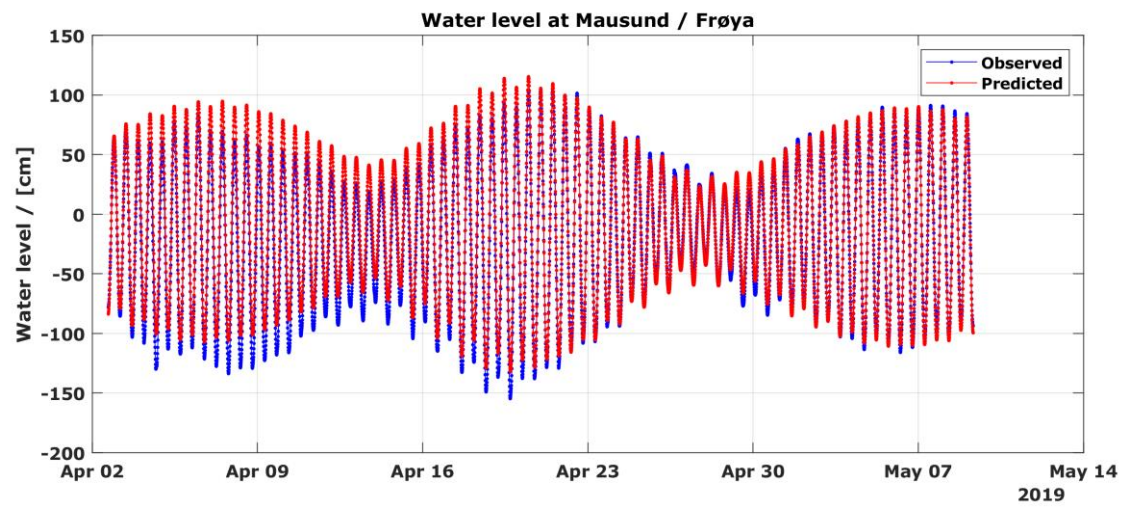

APPENDIX D – UNCERTAINTY

1. Reference uncertainty

The reference uncertainty of the specific reference heights is calculated based on the verification of the RLL [4], the RLL Lidar type classification and the mounting effects. Table 13 shows the applied RLL uncertainty components.

Table 13: RLL uncertainty components

WS bin	RLL uncertainty (in %) for 120m & 100m				RLL uncertainty (in %) for 80m				RLL uncertainty (in %) for 60m			
	RLL Verif.	RLL Class.	RLL Mount.	Combined	RLL Verif.	RLL Class.	RLL Mount.	Combined	RLL Verif.	RLL Class.	RLL Mount.	Combined
4	2.48	1.05	0.2	2.70	2.47	1.4	0.2	2.85	2.28	1.15	0.2	2.56
4.5	2.24	1.05	0.2	2.48	2.2	1.4	0.2	2.62	2.08	1.15	0.2	2.39
5	1.89	1.05	0.2	2.17	1.9	1.4	0.2	2.37	1.92	1.15	0.2	2.25
5.5	1.93	1.05	0.2	2.21	1.76	1.4	0.2	2.26	1.76	1.15	0.2	2.11
6	1.75	1.05	0.2	2.05	1.66	1.4	0.2	2.18	1.78	1.15	0.2	2.13
6.5	1.71	1.05	0.2	2.02	1.57	1.4	0.2	2.12	1.58	1.15	0.2	1.97
7	2.19	1.05	0.2	2.44	1.49	1.4	0.2	2.06	1.52	1.15	0.2	1.92
7.5	1.55	1.05	0.2	1.89	1.41	1.4	0.2	2.00	1.5	1.15	0.2	1.90
8	1.39	1.05	0.2	1.76	1.37	1.4	0.2	1.97	1.45	1.15	0.2	1.86
8.5	1.51	1.05	0.2	1.85	1.34	1.4	0.2	1.95	1.36	1.15	0.2	1.80
9	1.29	1.05	0.2	1.68	1.28	1.4	0.2	1.91	1.36	1.15	0.2	1.80
9.5	1.28	1.05	0.2	1.67	1.29	1.4	0.2	1.92	1.54	1.15	0.2	1.93
10	1.24	1.05	0.2	1.64	1.39	1.4	0.2	1.99	1.49	1.15	0.2	1.90
10.5	1.22	1.05	0.2	1.63	1.2	1.4	0.2	1.86	1.68	1.15	0.2	2.05
11	1.17	1.05	0.2	1.59	1.55	1.4	0.2	2.10	1.46	1.15	0.2	1.87
11.5	1.18	1.05	0.2	1.60	1.26	1.4	0.2	1.90	1.31	1.15	0.2	1.76
12	1.14	1.05	0.2	1.57	1.18	1.4	0.2	1.84	1.41	1.15	0.2	1.83
12.5	1.21	1.05	0.2	1.62	1.26	1.4	0.2	1.90	1.65	1.15	0.2	2.02
13	2.14	1.05	0.2	2.39	1.17	1.4	0.2	1.84	1.07	1.15	0.2	1.59
13.5	1.46	1.05	0.2	1.81	1.9	1.4	0.2	2.37	-	1.15	0.2	-
14	1.22	1.05	0.2	1.63	1.45	1.4	0.2	2.03	-	1.15	0.2	-
14.5	1.44	1.05	0.2	1.80	-	1.4	0.2	-	1.93	1.15	0.2	2.26
15	-	1.05	0.2	-	1.26	1.4	0.2	1.90	1.26	1.15	0.2	1.72
15.5	-	1.05	0.2	-	-	1.4	0.2	-	-	1.15	0.2	-
16	-	1.05	0.2	-	-	1.4	0.2	-	-	1.15	0.2	-

2. Mean deviation of the FLS and the RLL

This is the relative deviation between the bin averages of the FLS and the RLL divided by with the reference measurement.

3. Standard uncertainty of the measurement of FLS

The standard deviation of the measurements was divided by the square root of the number of data records per bin. The relative uncertainty was calculated by dividing the value by the bin average wind speed of the reference measurement.

4. Mounting uncertainty of the remote sensor at the verification test

The uncertainty of the remote sensing device was estimated to be 0.5 %.

5. Uncertainty due to non-homogenous flow

The FLS device is located in close proximity of the RLL in simple terrain. As a result the uncertainty due to non-homogenous flow within the measurement volume is considered to be negligible.

6. Uncertainty due to separation distance

DNV GL considered the uncertainty due to the separation distance between FLS and RLL according to the proposed formula (4) in [11]. For a separation distance of 980 m at a coastal site, the uncertainty was calculated to be 0.49%.



$$U_{sep} = \frac{980m \cdot 0.5 \frac{\%}{km}}{1000}$$

DNV GL notes that this calculation differs from the recommended approach stated in the IEC for power curve measurement but reflects a broad knowledge of FLS investigations.

APPENDIX E –WS COMPARISON WITHOUT SECTOR FILTER

	# values	slope	R ²	WS-avg RLL	WS-avg FLS	mean diff.	rel. mean difference
	-	-	-	[m/s]	[m/s]	[m/s]	%
WS-range	KPI X _{mws}	KPI R ² _{mws}					
250 m level							
All >= 2 m/s	3977	1.009	0.987	7.42	7.51	0.087	1.17%
4 - 16 m/s	3257	1.010	0.983	7.96	8.05	0.086	1.08%
200 m level							
All >= 2 m/s	4007	1.003	0.985	7.32	7.36	0.038	0.52%
4 - 16 m/s	3281	1.005	0.987	7.93	7.97	0.044	0.55%
180 m level							
All >= 2 m/s	4222	1.002	0.987	7.19	7.21	0.020	0.28%
4 - 16 m/s	3434	1.003	0.987	7.87	7.90	0.026	0.33%
160 m level							
All >= 2 m/s	4248	1.000	0.988	7.14	7.14	-0.004	-0.05%
4 - 16 m/s	3458	1.000	0.985	7.86	7.86	0.002	0.02%
140 m level							
All >= 2 m/s	4280	0.996	0.986	7.08	7.05	-0.033	-0.47%
4 - 16 m/s	3471	0.996	0.983	7.83	7.80	-0.031	-0.40%
120 m level							
All >= 2 m/s	4319	0.993	0.984	7.01	6.96	-0.055	-0.78%
4 - 16 m/s	3510	0.993	0.980	7.77	7.72	-0.053	-0.69%
100 m level							
All >= 2 m/s	4357	0.991	0.982	6.90	6.83	-0.065	-0.95%
4 - 16 m/s	3547	0.992	0.977	7.66	7.60	-0.063	-0.83%
80 m level							
All >= 2 m/s	4365	0.993	0.978	6.74	6.69	-0.055	-0.82%
4 - 16 m/s	3566	0.993	0.973	7.49	7.44	-0.051	-0.67%
60 m level							
All >= 2 m/s	4326	0.999	0.971	6.51	6.49	-0.015	-0.22%
4 - 16 m/s	3502	1.000	0.964	7.29	7.29	-0.005	-0.07%
40 m level							
All >= 2 m/s	4154	1.019	0.959	6.16	6.25	0.091	1.47%
4 - 16 m/s	3277	1.020	0.948	6.98	7.10	0.121	1.73%

KPI	Passed Best practice
KPI	Passed Minimum
KPI	Failed

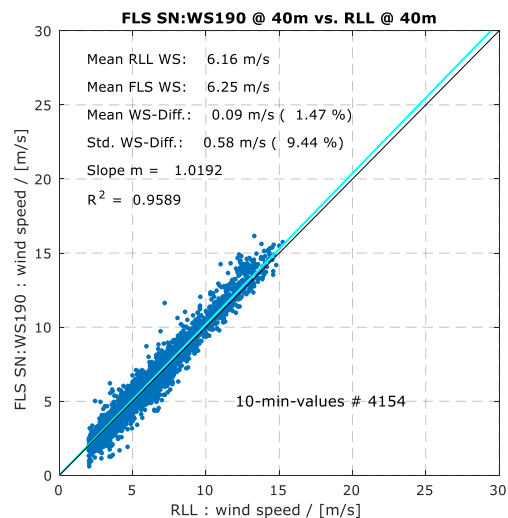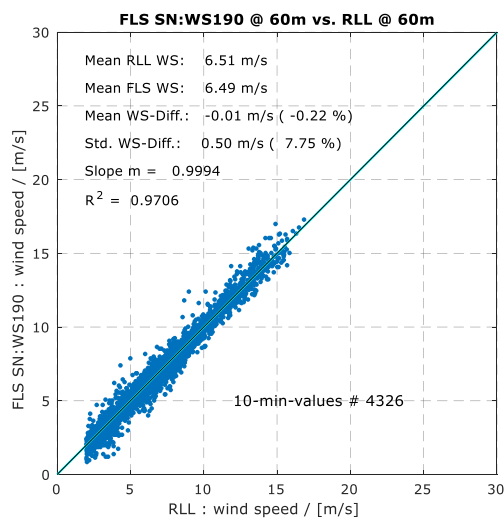



ABOUT DNV GL

DNV GL is a global quality assurance and risk management company. Driven by our purpose of safeguarding life, property and the environment, we enable our customers to advance the safety and sustainability of their business. We provide classification, technical assurance, software and independent expert advisory services to the maritime, oil & gas, power and renewables industries. We also provide certification, supply chain and data management services to customers across a wide range of industries. Operating in more than 100 countries, our experts are dedicated to helping customers make the world safer, smarter and greener.